


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE 6500

Lublin TOWER 136.430

Lublin
RNP RWY 07
ARGIX 1D ARGIX 1F LIBGA 1F
USEGI 1F VADOL 1F

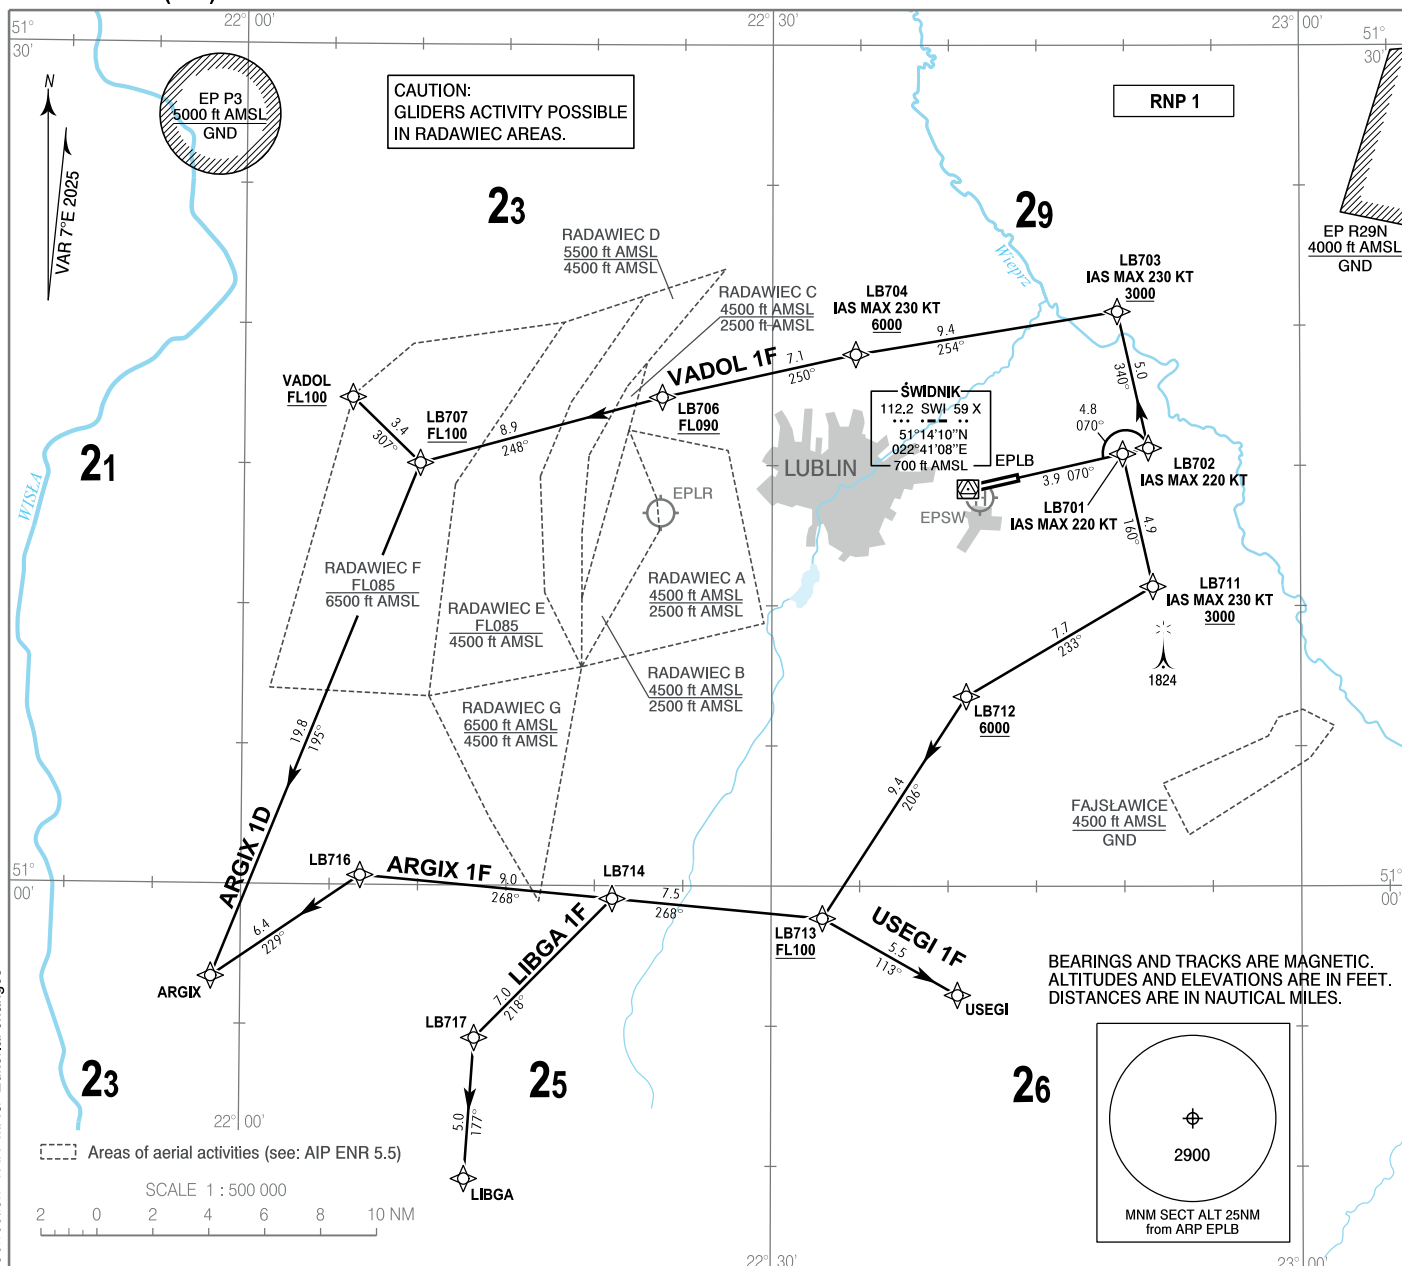

Correction: VAR. MAG. Editorial changes.

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Lublin
RNP RWY 07
ARGIX 1D ARGIX 1F LIBGA 1F USEGI 1F VADOL 1F

ARGIX 1D

PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UP TO LB707

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LB702	-	070 (077.3)	4.84	-	-	-220	RNP 1
002	TF	LB703	-	340 (347.2)	5.00	-	+3000 ft	-230	RNP 1
003	TF	LB704	-	254 (260.5)	9.45	-	+6000 ft	-230	RNP 1
004	TF	LB706	-	250 (257.3)	7.07	-	+FL090	-	RNP 1
005	TF	LB707	-	248 (254.6)	8.95	-	+FL100	-	RNP 1
006	TF	ARGIX	-	195 (201.7)	19.79	-	-	-	RNP 1

ARGIX 1F

PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UP TO LB713

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LB701	-	070 (077.3)	3.90	-	-	-220	RNP 1
002	TF	LB711	-	160 (167.3)	4.86	-	+3000 ft	-230	RNP 1
003	TF	LB712	-	233 (239.4)	7.74	-	+6000 ft	-	RNP 1
004	TF	LB713	-	206 (212.8)	9.45	-	+FL100	-	RNP 1
005	TF	LB714	-	268 (275.2)	7.55	-	-	-	RNP 1
006	TF	LB716	-	268 (275.0)	9.05	-	-	-	RNP 1
007	TF	ARGIX	-	229 (235.5)	6.44	-	-	-	RNP 1

LIBGA 1F

PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UP LB713

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LB701	-	070 (077.3)	3.90	-	-	-220	RNP 1
002	TF	LB711	-	160 (167.3)	4.86	-	+3000 ft	-230	RNP 1
003	TF	LB712	-	233 (239.4)	7.74	-	+6000 ft	-	RNP 1
004	TF	LB713	-	206 (212.8)	9.45	-	+FL100	-	RNP 1
005	TF	LB714	-	268 (275.2)	7.55	-	-	-	RNP 1
006	TF	LB717	-	218 (224.5)	7.00	-	-	-	RNP 1
007	TF	LIBGA	-	177 (183.8)	5.05	-	-	-	RNP 1

USEGI 1F

PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UP TO USEGI

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LB701	-	070 (077.3)	3.90	-	-	-220	RNP 1
002	TF	LB711	-	160 (167.3)	4.86	-	+3000 ft	-230	RNP 1
003	TF	LB712	-	233 (239.4)	7.74	-	+6000 ft	-	RNP 1
004	TF	LB713	-	206 (212.8)	9.45	-	+FL100	-	RNP 1
005	TF	USEGI	-	113 (119.6)	5.55	-	-	-	RNP 1

VADOL 1F

PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UP TO LB707

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LB702	-	070 (077.3)	4.84	-	-	-220	RNP 1
002	TF	LB703	-	340 (347.2)	5.00	-	+3000 ft	-230	RNP 1
003	TF	LB704	-	254 (260.5)	9.45	-	+6000 ft	-230	RNP 1
004	TF	LB706	-	250 (257.3)	7.07	-	+FL090	-	RNP 1
005	TF	LB707	-	248 (254.6)	8.95	-	+FL100	-	RNP 1
006	TF	VADOL	-	307 (313.9)	3.36	-	+FL100	-	RNP 1

WAYPOINT IDENTIFIER	COORDINATES	
ARGIX	50 56 42.0 N	021 58 20.0 E
DER07	51 14 33.7 N	022 43 52.0 E
LB701	51 15 25.4 N	022 49 54.9 E
LB702	51 15 37.8 N	022 51 22.4 E
LB703	51 20 29.9 N	022 49 36.8 E
LB704	51 18 57.8 N	022 34 44.5 E
LB706	51 17 25.2 N	022 23 44.7 E
LB707	51 15 03.2 N	022 10 00.3 E
LB711	51 10 41.4 N	022 51 37.1 E
LB712	51 06 45.9 N	022 41 01.7 E
LB713	50 58 50.5 N	022 32 53.8 E
LB714	50 59 31.9 N	022 21 00.1 E
LB716	51 00 20.0 N	022 06 44.0 E
LB717	50 54 33.0 N	022 13 14.0 E
LIBGA	50 49 31.0 N	022 12 42.0 E
USEGI	50 56 06.7 N	022 40 31.7 E
VADOL	51 17 23.0 N	022 06 09.0 E