


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Lódź DELIVERY	120.005
Lódź TOWER	124.230
ATIS	135.680

Lódź
RNP Rwy 07
ADOXO 1E AGAVA 1E BAXIS 1E
UTOLU 1E VIDEV 1E

Correction: Editorial changes.

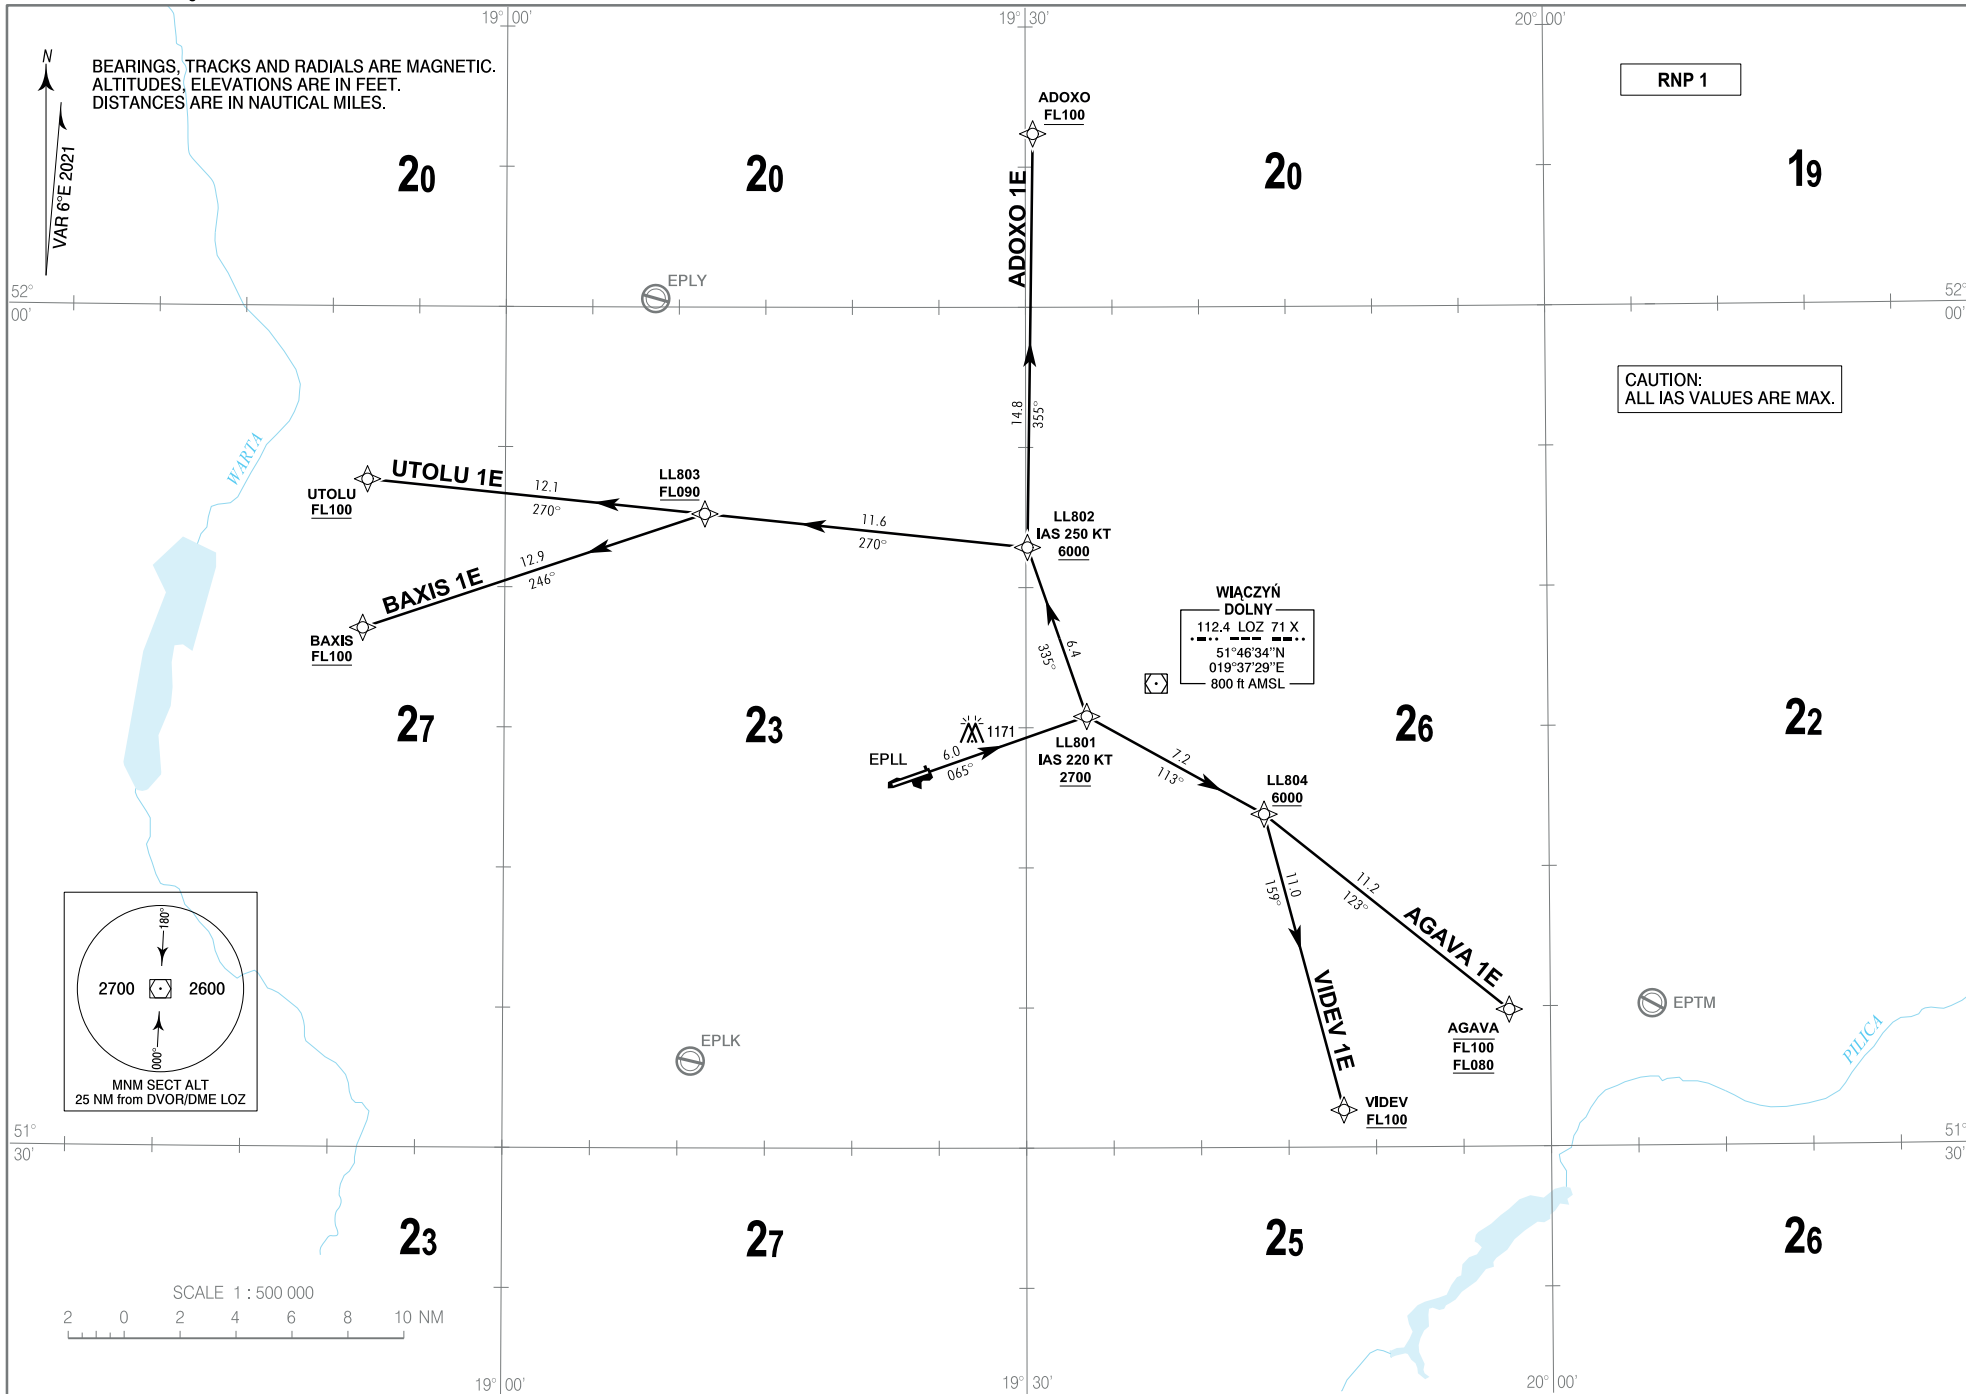

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

Łódź

RNP RWY 07

ADOXO 1E AGAVA 1E BAXIS 1E UTOLU 1E VIDEV 1E

ADOXO 1E

PDG 7% REQUIRED DUE TO OBSTACLES AND OPERATIONAL REASONS UNTIL LL802

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LL801	065 (070.7)	5.97	+2700 ft	-220	RNP 1
002	TF	LL802	335 (340.8)	6.40	+6000 ft	-250	RNP 1
003	TF	ADOXO	355 (000.8)	14.78	+FL100	-	RNP 1

AGAVA 1E

PDG 7% REQUIRED DUE TO OBSTACLES AND OPERATIONAL REASONS UNTIL LL804

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LL801	065 (070.7)	5.97	+2700 ft	-220	RNP 1
002	TF	LL804	113 (119.0)	7.23	+6000 ft	-	RNP 1
003	TF	AGAVA	123 (128.7)	11.19	-FL100 +FL80	-	RNP 1

BAXIS 1E

PDG 7% REQUIRED DUE TO OBSTACLES AND OPERATIONAL REASONS UNTIL LL802

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LL801	065 (070.7)	5.97	+2700 ft	-220	RNP 1
002	TF	LL802	335 (340.8)	6.40	+6000 ft	-250	RNP 1
003	TF	LL803	270 (276.0)	11.58	+FL90	-	RNP 1
004	TF	BAXIS	246 (251.5)	12.88	+FL100	-	RNP 1

UTOLU 1E

PDG 7% REQUIRED DUE TO OBSTACLES AND OPERATIONAL REASONS UNTIL LL802

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LL801	065 (070.7)	5.97	+2700 ft	-220	RNP 1
002	TF	LL802	335 (340.8)	6.40	+6000 ft	-250	RNP 1
003	TF	LL803	270 (276.0)	11.58	+FL90	-	RNP 1
004	TF	UTOLU	270 (275.8)	12.12	+FL100	-	RNP 1

VIDEV 1E

PDG 7% REQUIRED DUE TO OBSTACLES AND OPERATIONAL REASONS UNTIL LL804

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	LL801	065 (070.7)	5.97	+2700 ft	-220	RNP 1
002	TF	LL804	113 (119.0)	7.23	+6000 ft	-	RNP 1
003	TF	VIDEV	159 (165.1)	10.95	+FL100	-	RNP 1

WAYPOINT IDENTIFIER	COORDINATES	
ADOXO	520611.2N	0193026.0E
AGAVA	513453.1N	0195738.7E
BAXIS	514831.0N	0185150.0E
DER07	514325.9N	0192425.7E
LL801	514524.0N	0193329.5E
LL802	515125.9N	0193005.6E
LL803	515237.4N	0191130.6E
LL804	514153.5N	0194339.4E
UTOLU	515349.0N	0185203.0E
VIDEV	513119.4N	0194809.1E