
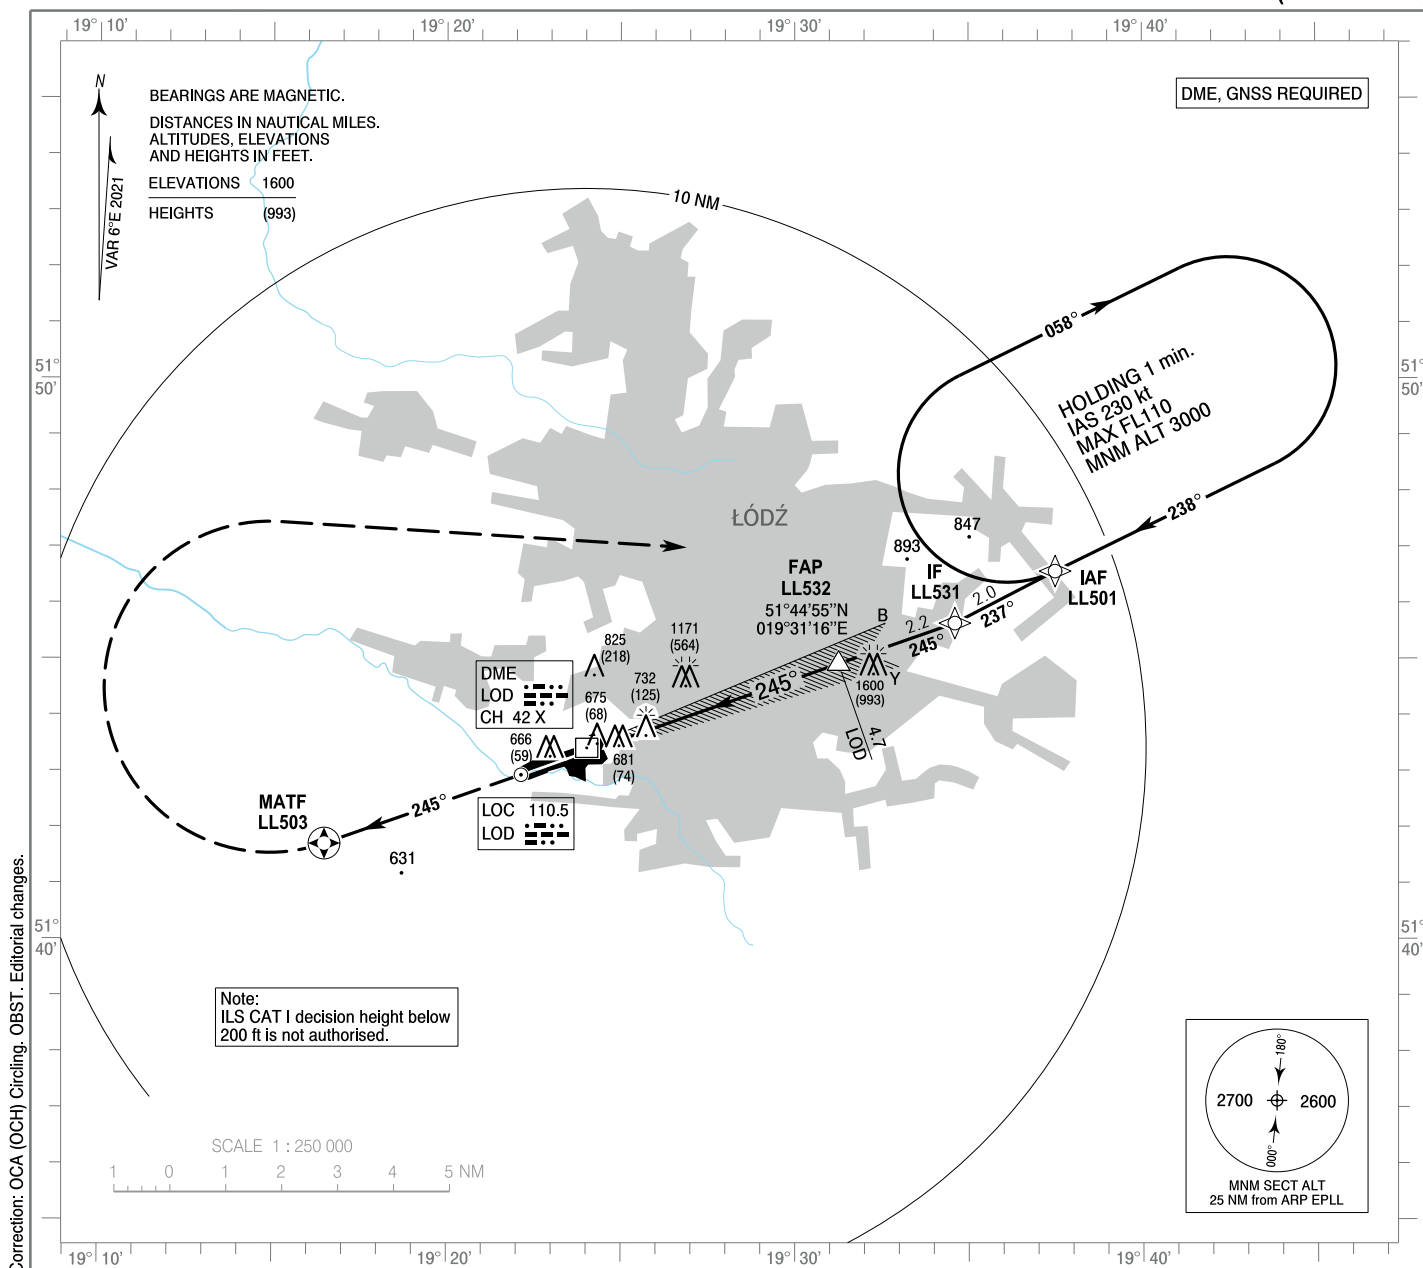


INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 607 ft
THR RWY 25 ELEV 607 ft
HEIGHTS RELATED TO THR RWY 25Łódź DELIVERY 120.005
Łódź TOWER 124.230
ATIS 135.680Łódź
ILS z
RWY 25 (CAT A/B/C/D)

MISSED APPROACH

Climb straight ahead on course 245°
to LL503, turn right to LL501
climbing to 3000 (2393).
Further instructions from ATC.
Turn limited to 220 kt IAS max.

TRANSITION ALTITUDE 6500

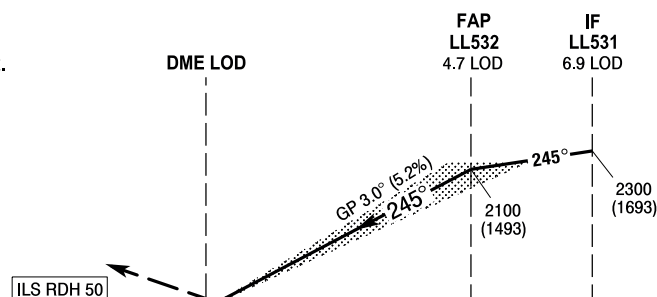

SCALE 1 : 250 000

NM FROM THR RWY 25

OCA (OCH)						Distance FAP - RW25 4.5 NM							
Cat. of ACFT		A	B	C	D	Speed	kt	80	100	120	140	160	180
Straight - in	Cat. I	804 (197)	816 (209)	824 (217)	835 (228)	Time	min : s	3 : 24	2 : 43	2 : 16	1 : 57	1 : 42	1 : 31
						Rate of descent	ft / min	420	530	640	740	850	960
						Final approach distance/altitude (height)							
Circling (OCH AAL)*		1120 (513)	1470 (863)	1570 (963)	2000 (1393)	Distance		4		3		2	
* ACFT cat C/D circling north of aerodrome only.						Altitude (height)		1870 (1263)		1550 (943)		1230 (623)	

Łódź
ILS z
RWY 25 (CAT A/B/C/D)

EPLL RNP RWY25 INITIAL TRANSITION FROM LL501

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	VPA/TCH	NAV SPEC
001	IF	LL501	-	-	-	-	+3000 ft	-230	-	RNP APCH
002	TF	LL531	-	237 (242.67)	2.02	-	+2300 ft	-	-	RNP APCH

EPLL RNP RWY25 MISSED APPROACH

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	VPA/TCH	NAV SPEC
001	-	RW25	-	-	-	-	-	-	-	RNP APCH
002	CF	LL503	Y	245 (250.76)	5.20	-	-	-220	-	RNP APCH
003	DF	LL501	-	-	-	R	+3000 ft	-220	-	RNP APCH

WAYPOINT IDENTIFIER	COORDINATES		FIX FORMATION	
LL501 (IAF)	514633.9N	019 37 29.3E	-	-
LL531 (IF)	514538.4N	0193436.3E	250.63° GEO (245° MAG) LOC LOD	6.94 NM DME LOD
LL532 (FAP)	514455.0N	0193115.7E	250.63° GEO (245° MAG) LOC LOD	4.74 NM DME LOD
RW25	514325.2N	0192422.8E	-	-
LL503 (MATF)	514142.3N	0191629.5E	-	-
LL501 (MAHF)	514633.9N	0193729.3E	-	-