


Warszawa APPROACH	125.055, 128.805, 129.380, 135.930
Modlin DELIVERY	119.680
Modlin TOWER	123.930
ATIS	136.555

BAMSO 4J EVINA 4J LOLSI 4J
OLILA 4J SOXER 4J XIMBA 4J

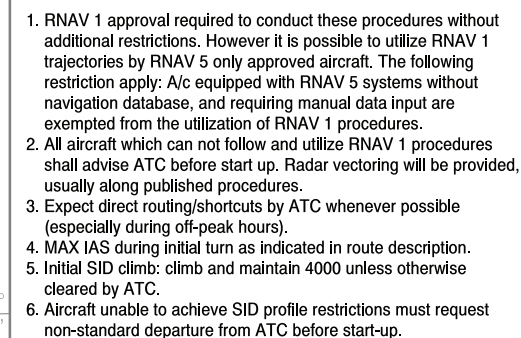

SET TRANSPONDER TO 7600

a) Continue on assigned and acknowledged SID.
After 3 minutes from setting 7600 climb to FPL flight level.

b) If being vectored, continue on assigned heading
for 3 minutes from setting 7600 then proceed direct
to last SID WP climbing to FPL flight level.

Climb straight ahead MAG track 255°. Minimum turn altitude 1000 ft. Turn direction and heading as per ATC clearance. ATC surveillance minimum altitude 2600 ft. Minimum climb gradient 6%. No turns before departure end of the runway. No departures permitted within sector 090° - 250° MAG.

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

WARSZAWA / MODLIN
RNAV RWY 26
BAMSO 4J EVINA 4J LOLSI 4J OLILA 4J SOXER 4J XIMBA 4J

BAMSO 4J

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL MO826

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	MO824	-	255 (261.3)	4.00	-	-	-200	RNAV 1
002	TF	MO826	-	351 (356.9)	10.05	-	-	-250	RNAV 1
003	TF	MO857	-	075 (081.3)	8.74	-	+5000 ft	-	RNAV 1
004	TF	MO858	-	080 (086.1)	9.44	-	-	-	RNAV 1
005	TF	MO859	-	141 (146.8)	18.33	-	-	-	RNAV 1
006	TF	BAMSO	-	091 (096.7)	23.41	-	-	-	RNAV 1

EVINA 4J

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL MO826

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	MO824	-	255 (261.3)	4.00	-	-	-200	RNAV 1
002	TF	MO826	-	351 (356.9)	10.05	-	-	-250	RNAV 1
003	TF	MO857	-	075 (081.3)	8.74	-	+5000 ft	-	RNAV 1
004	TF	MO858	-	080 (086.1)	9.44	-	-	-	RNAV 1
005	TF	MO859	-	141 (146.8)	18.33	-	-	-	RNAV 1
006	TF	MO818	-	226 (231.7)	11.92	-	-	-	RNAV 1
007	TF	NITKI	-	216 (222.0)	25.06	-	-	-	RNAV 1
008	TF	NIPUS	-	194 (199.9)	18.90	-	-	-	RNAV 1
009	TF	EVINA	-	179 (185.4)	16.00	-	-	-	RNAV 1

LOLSI 4J

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL MO826

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	MO824	-	255 (261.3)	4.00	-	-	-200	RNAV 1
002	TF	MO826	-	351 (356.9)	10.05	-	-	-250	RNAV 1
003	TF	MO857	-	075 (081.3)	8.74	-	+5000 ft	-	RNAV 1
004	TF	MO858	-	080 (086.1)	9.44	-	-	-	RNAV 1
005	TF	MO859	-	141 (146.8)	18.33	-	-	-	RNAV 1
006	TF	MO818	-	226 (231.7)	11.92	-	-	-	RNAV 1
007	TF	MO861	-	225 (231.5)	9.27	-	-	-	RNAV 1
008	TF	GILAL	-	226 (231.7)	13.21	-	-	-	RNAV 1
009	TF	LOLSI	-	284 (290.2)	26.62	-	-	-	RNAV 1

OLILA 4J

PDG 7% REQUIRED DUE TO AIRSPACE RESTRICTIONS AND OPERATIONAL REASONS UNTIL OLILA

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	MO824	-	255 (261.3)	4.00	-	-	-200	RNAV 1
002	TF	MO826	-	351 (356.9)	10.05	-	+6000 ft	-	RNAV 1
003	TF	MO829	-	345 (351.1)	4.66	-	-	-	RNAV 1
004	TF	OLILA	-	276 (282.3)	6.09	-	-	-	RNAV 1

SOXER 4J

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL MO826

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	MO824	-	255 (261.3)	4.00	-	-	-200	RNAV 1
002	TF	MO826	-	351 (356.9)	10.05	-	-	-250	RNAV 1
003	TF	MO857	-	075 (081.3)	8.74	-	+5000 ft	-	RNAV 1
004	TF	MO858	-	080 (086.1)	9.44	-	-	-	RNAV 1
005	TF	MO859	-	141 (146.8)	18.33	-	-	-	RNAV 1
006	TF	MO818	-	226 (231.7)	11.92	-	-	-	RNAV 1
007	TF	MO861	-	225 (231.5)	9.27	-	-	-	RNAV 1
008	TF	GILAL	-	226 (231.7)	13.21	-	-	-	RNAV 1
009	TF	SOXER	-	267 (272.8)	22.73	-	-	-	RNAV 1

XIMBA 4J

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL MO826

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	MO824	-	255 (261.3)	4.00	-	-	-200	RNAV 1
002	TF	MO826	-	351 (356.9)	10.05	-	-	-250	RNAV 1
003	TF	MO857	-	075 (081.3)	8.74	-	+5000 ft	-	RNAV 1
004	TF	MO858	-	080 (086.1)	9.44	-	-	-	RNAV 1
005	TF	MO859	-	141 (146.8)	18.33	-	-	-	RNAV 1
006	TF	MO818	-	226 (231.7)	11.92	-	-	-	RNAV 1
007	TF	WA656	-	166 (171.8)	14.53	-	-	-	RNAV 1
008	TF	XIMBA	-	143 (149.3)	25.44	-	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
BAMSO	522009.1N	0215434.5E
EVINA	512316.0N	0202136.0E
GILAL	520136.5N	0203252.4E
LOLSI	521038.9N	0195217.0E
MO818	521534.7N	0210126.6E
MO824	522621.6N	0203133.7E
MO826	523622.8N	0203039.6E
MO829	524058.7N	0202928.8E
MO857	523740.8N	0204450.0E
MO858	523818.6N	0210017.5E
MO859	522258.3N	0211640.3E
MO861	520948.5N	0204939.6E
NIPUS	513910.8N	0202359.8E
NITKI	515656.1N	0203420.3E
OLILA	524216.0N	0201942.0E
SOXER	520237.8N	0195605.9E
WA656	520113.2N	0210447.7E
XIMBA	513921.0N	0212540.0E