


TRANSITION ALTITUDE 6500

Poznań APPROACH	128.925
Poznań DELIVERY	121.805
Poznań GROUND	124.140
Poznań TOWER	119.980

DEKUT 2H ELSUP 2H ERNOX 2H
OBOKU 2H XERBI 2H XIDNA 2H

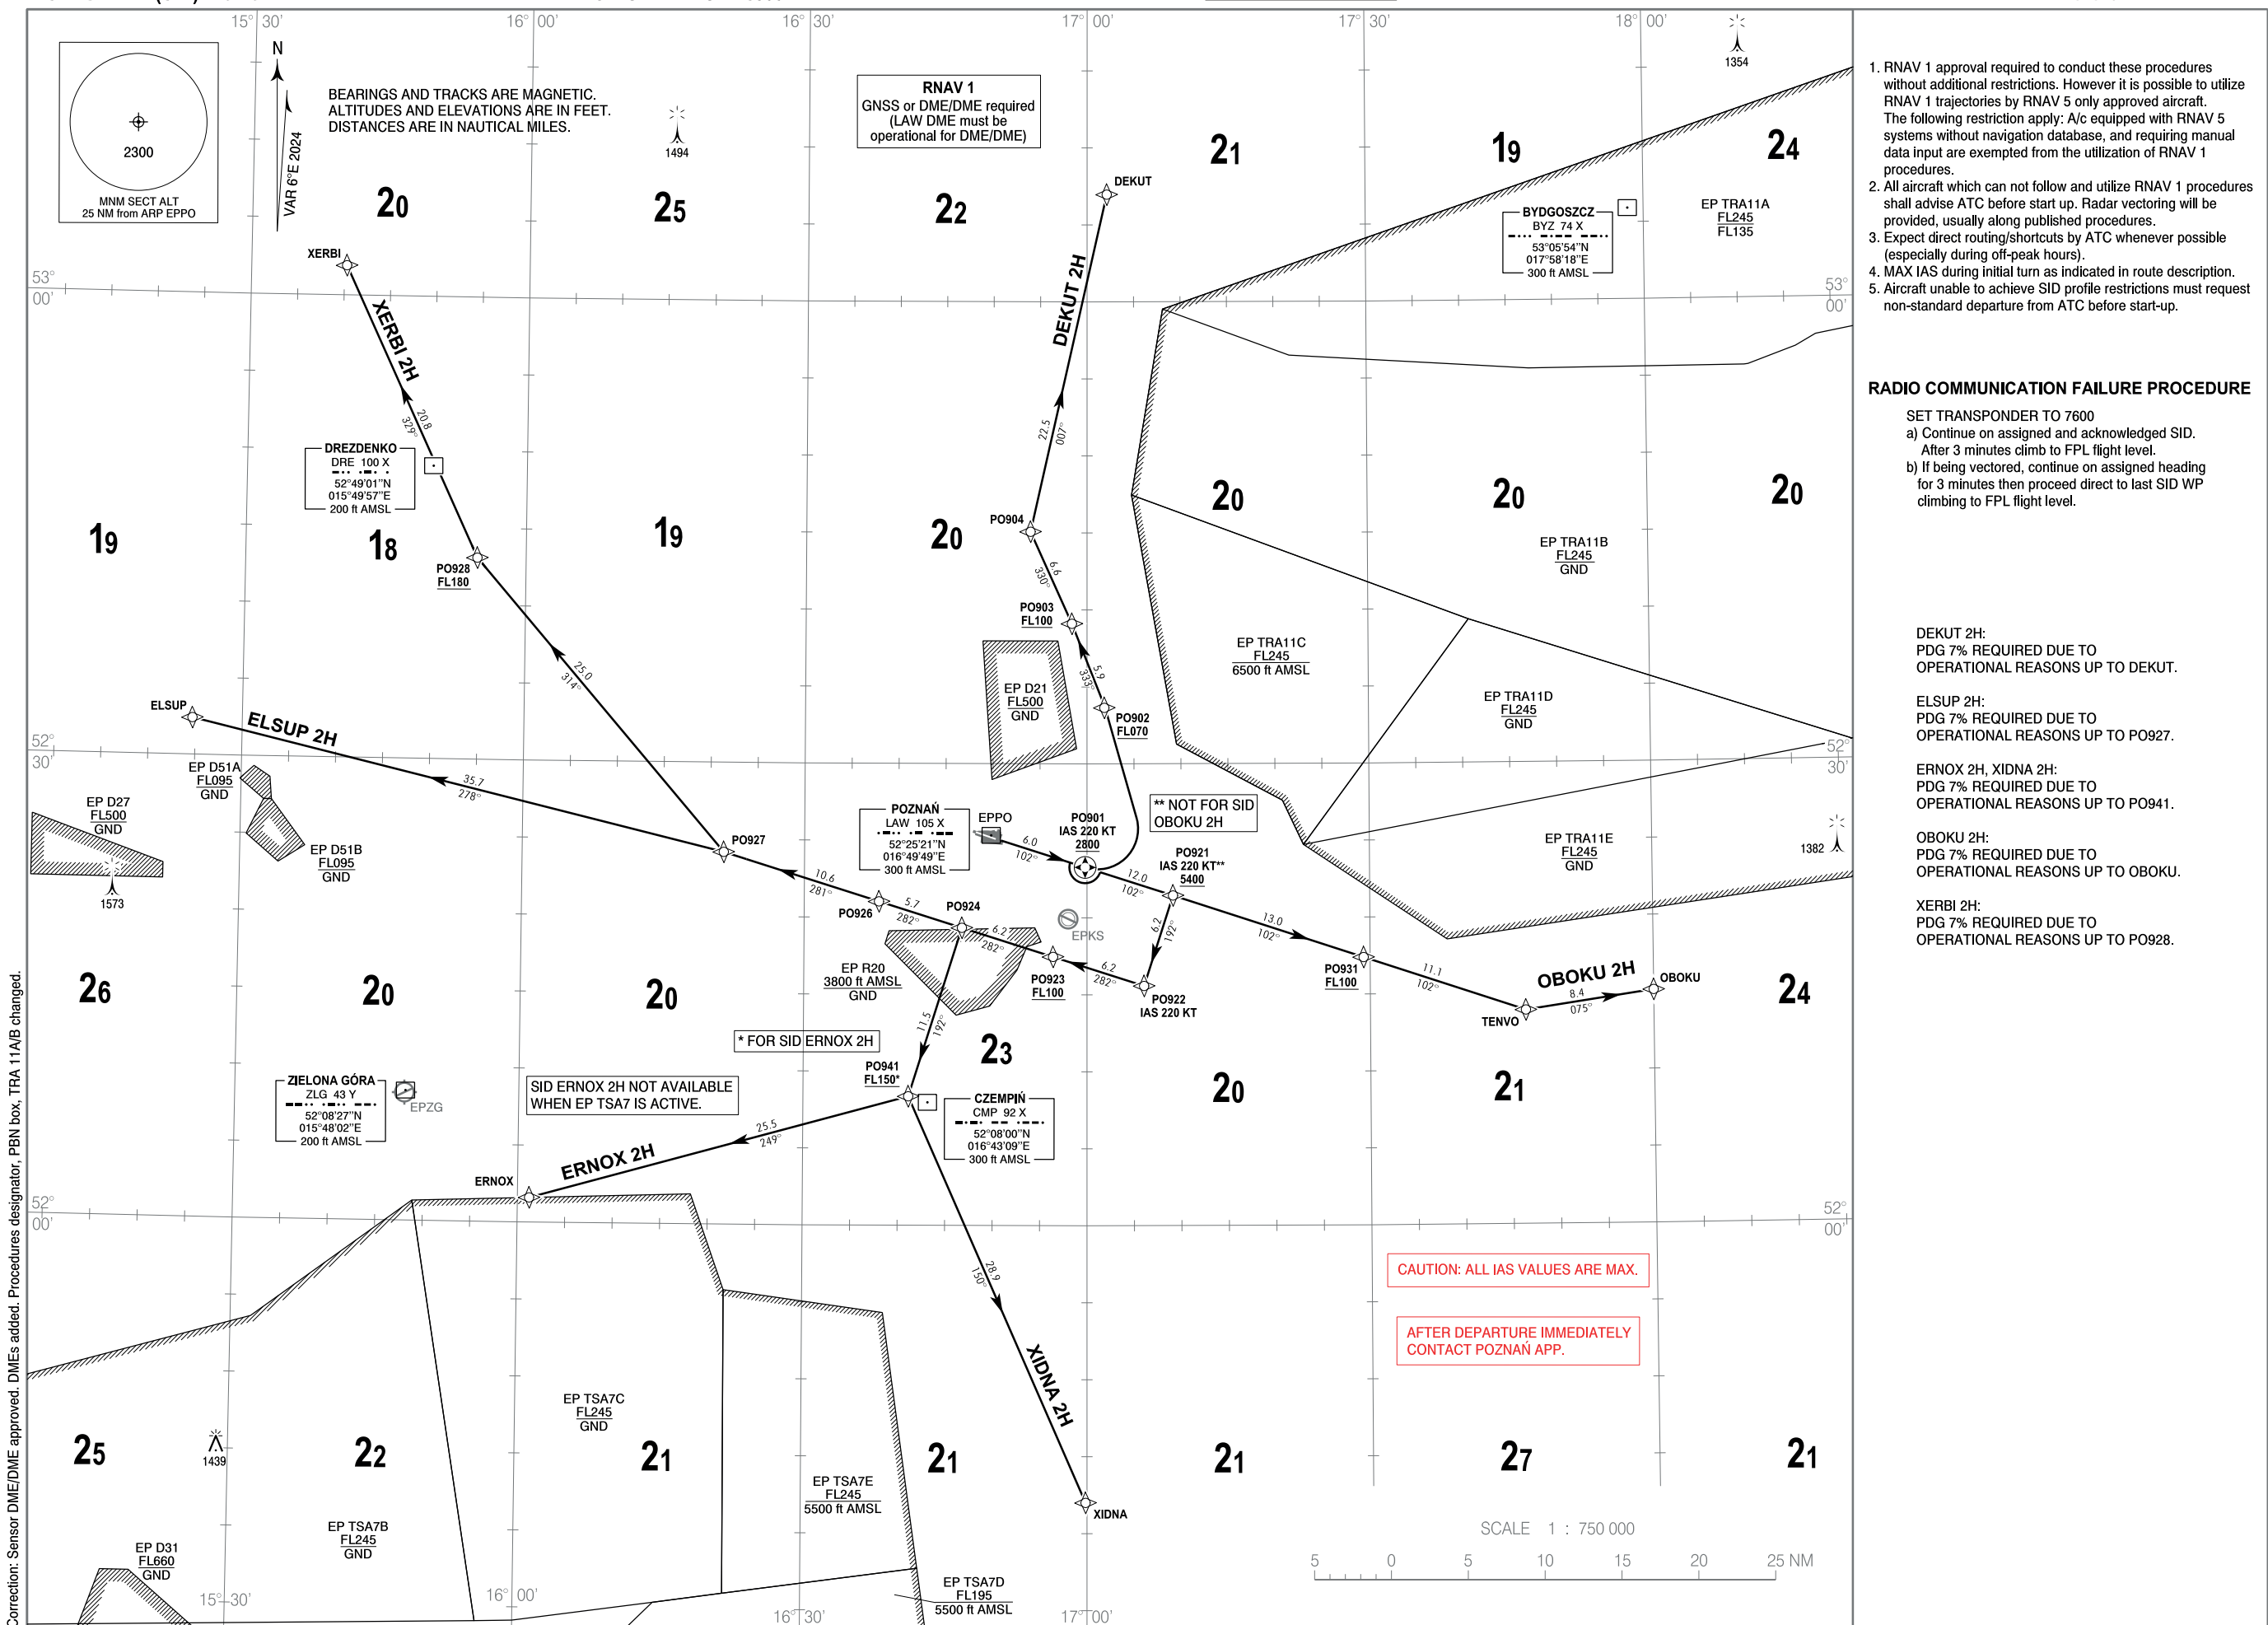

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

POZNAŃ/Ławica
RNAV RWY 10
DEKUT 2H ELSUP 2H ERNOX 2H OBOKU 2H XERBI 2H XIDNA 2H

DEKUT 2H

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL DEKUT

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	PO901	Y	102 (107.6)	6.00	-	+2800 ft	-220	RNAV 1
002	DF	PO902	-	-	-	-	+FL070	-	RNAV 1
003	TF	PO903	-	333 (338.9)	5.86	-	+FL100	-	RNAV 1
004	TF	PO904	-	330 (335.8)	6.56	-	-	-	RNAV 1
005	TF	DEKUT	-	007 (012.6)	22.48	-	-	-	RNAV 1

ELSUP 2H

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PO927

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	PO921	-	102 (107.6)	12.00	-	+5400 ft	-220	RNAV 1
002	TF	PO922	-	192 (197.8)	6.18	-	-	-220	RNAV 1
003	TF	PO923	-	282 (287.8)	6.22	-	+FL100	-	RNAV 1
004	TF	PO924	-	282 (287.6)	6.23	-	-	-	RNAV 1
005	TF	PO926	-	282 (287.5)	5.66	-	-	-	RNAV 1
006	TF	PO927	-	281 (287.4)	10.60	-	-	-	RNAV 1
007	TF	ELSUP	-	278 (283.7)	35.66	-	-	-	RNAV 1

ERNOX 2H

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PO941

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	PO921	-	102 (107.6)	12.00	-	+5400 ft	-220	RNAV 1
002	TF	PO922	-	192 (197.8)	6.18	-	-	-220	RNAV 1
003	TF	PO923	-	282 (287.8)	6.22	-	+FL100	-	RNAV 1
004	TF	PO924	-	282 (287.6)	6.23	-	-	-	RNAV 1
005	TF	PO941	-	192 (197.5)	11.50	-	+FL150	-	RNAV 1
006	TF	ERNOX	-	249 (254.8)	25.53	-	-	-	RNAV 1

OBOKU 2H

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL OBOKU

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	PO921	-	102 (107.6)	12.00	-	+5400 ft	-	RNAV 1
002	TF	PO931	-	102 (108.0)	13.04	-	+FL100	-	RNAV 1
003	TF	TENVO	-	102 (108.3)	11.10	-	-	-	RNAV 1
004	TF	OBOKU	-	075 (081.5)	8.42	-	-	-	RNAV1

XERBI 2H

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PO928

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	PO921	-	102 (107.6)	12.00	-	+5400 ft	-220	RNAV 1
002	TF	PO922	-	192 (197.8)	6.18	-	-	-220	RNAV 1
003	TF	PO923	-	282 (287.8)	6.22	-	+FL100	-	RNAV 1
004	TF	PO924	-	282 (287.6)	6.23	-	-	-	RNAV 1
005	TF	PO926	-	282 (287.5)	5.66	-	-	-	RNAV 1
006	TF	PO927	-	281 (287.4)	10.60	-	-	-	RNAV 1
007	TF	PO928	-	314 (319.5)	24.96	-	+FL180	-	RNAV 1
008	TF	XERBI	-	329 (335.1)	20.82	-	-	-	RNAV 1

XIDNA 2H

PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PO941

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	PO921	-	102 (107.6)	12.00	-	+5400 ft	-220	RNAV 1
002	TF	PO922	-	192 (197.8)	6.18	-	-	-220	RNAV 1
003	TF	PO923	-	282 (287.8)	6.22	-	+FL100	-	RNAV 1
004	TF	PO924	-	282 (287.6)	6.23	-	-	-	RNAV 1
005	TF	PO941	-	192 (197.5)	11.50	-	-	-	RNAV 1
006	TF	XIDNA	-	150 (156.2)	28.85	-	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
DEKUT	53 06 58.0 N	017 02 07.0 E
ELSUP	52 32 24.0 N	015 24 41.0 E
ERNOX	52 01 36.0 N	016 01 14.0 E
OBOKU	52 15 08.0 N	018 00 00.0 E
PO901	52 23 16.6 N	016 59 48.1 E
PO902	52 33 38.4 N	017 01 50.7 E
PO903	52 39 05.9 N	016 58 23.2 E
PO904	52 45 04.3 N	016 53 57.4 E
PO921	52 21 27.0 N	017 09 07.6 E
PO922	52 15 34.5 N	017 06 03.1 E
PO923	52 17 27.8 N	016 56 24.3 E
PO924	52 19 20.5 N	016 46 44.1 E
PO926	52 21 02.2 N	016 37 55.8 E
PO927	52 24 10.9 N	016 21 24.9 E
PO928	52 43 05.6 N	015 54 46.9 E
PO931	52 17 23.8 N	017 29 18.9 E
PO941	52 08 23.2 N	016 41 07.1 E
TENVO	52 13 54.1 N	017 46 27.1 E
XERBI	53 01 56.0 N	015 40 16.0 E
XIDNA	51 42 00.0 N	016 59 51.0 E