


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Kraków APPROACH
Rzeszów GROUND
Rzeszów TOWER
133.030
121.805
126.805

Rzeszów - Jasionka
RNP RWY 09
DIBED 2P ETITI 2P GOVRI 2E GOVRI 2P
LUMEQ 1P LUXAR 2P VELAX 2P

Correction: Page number changed.

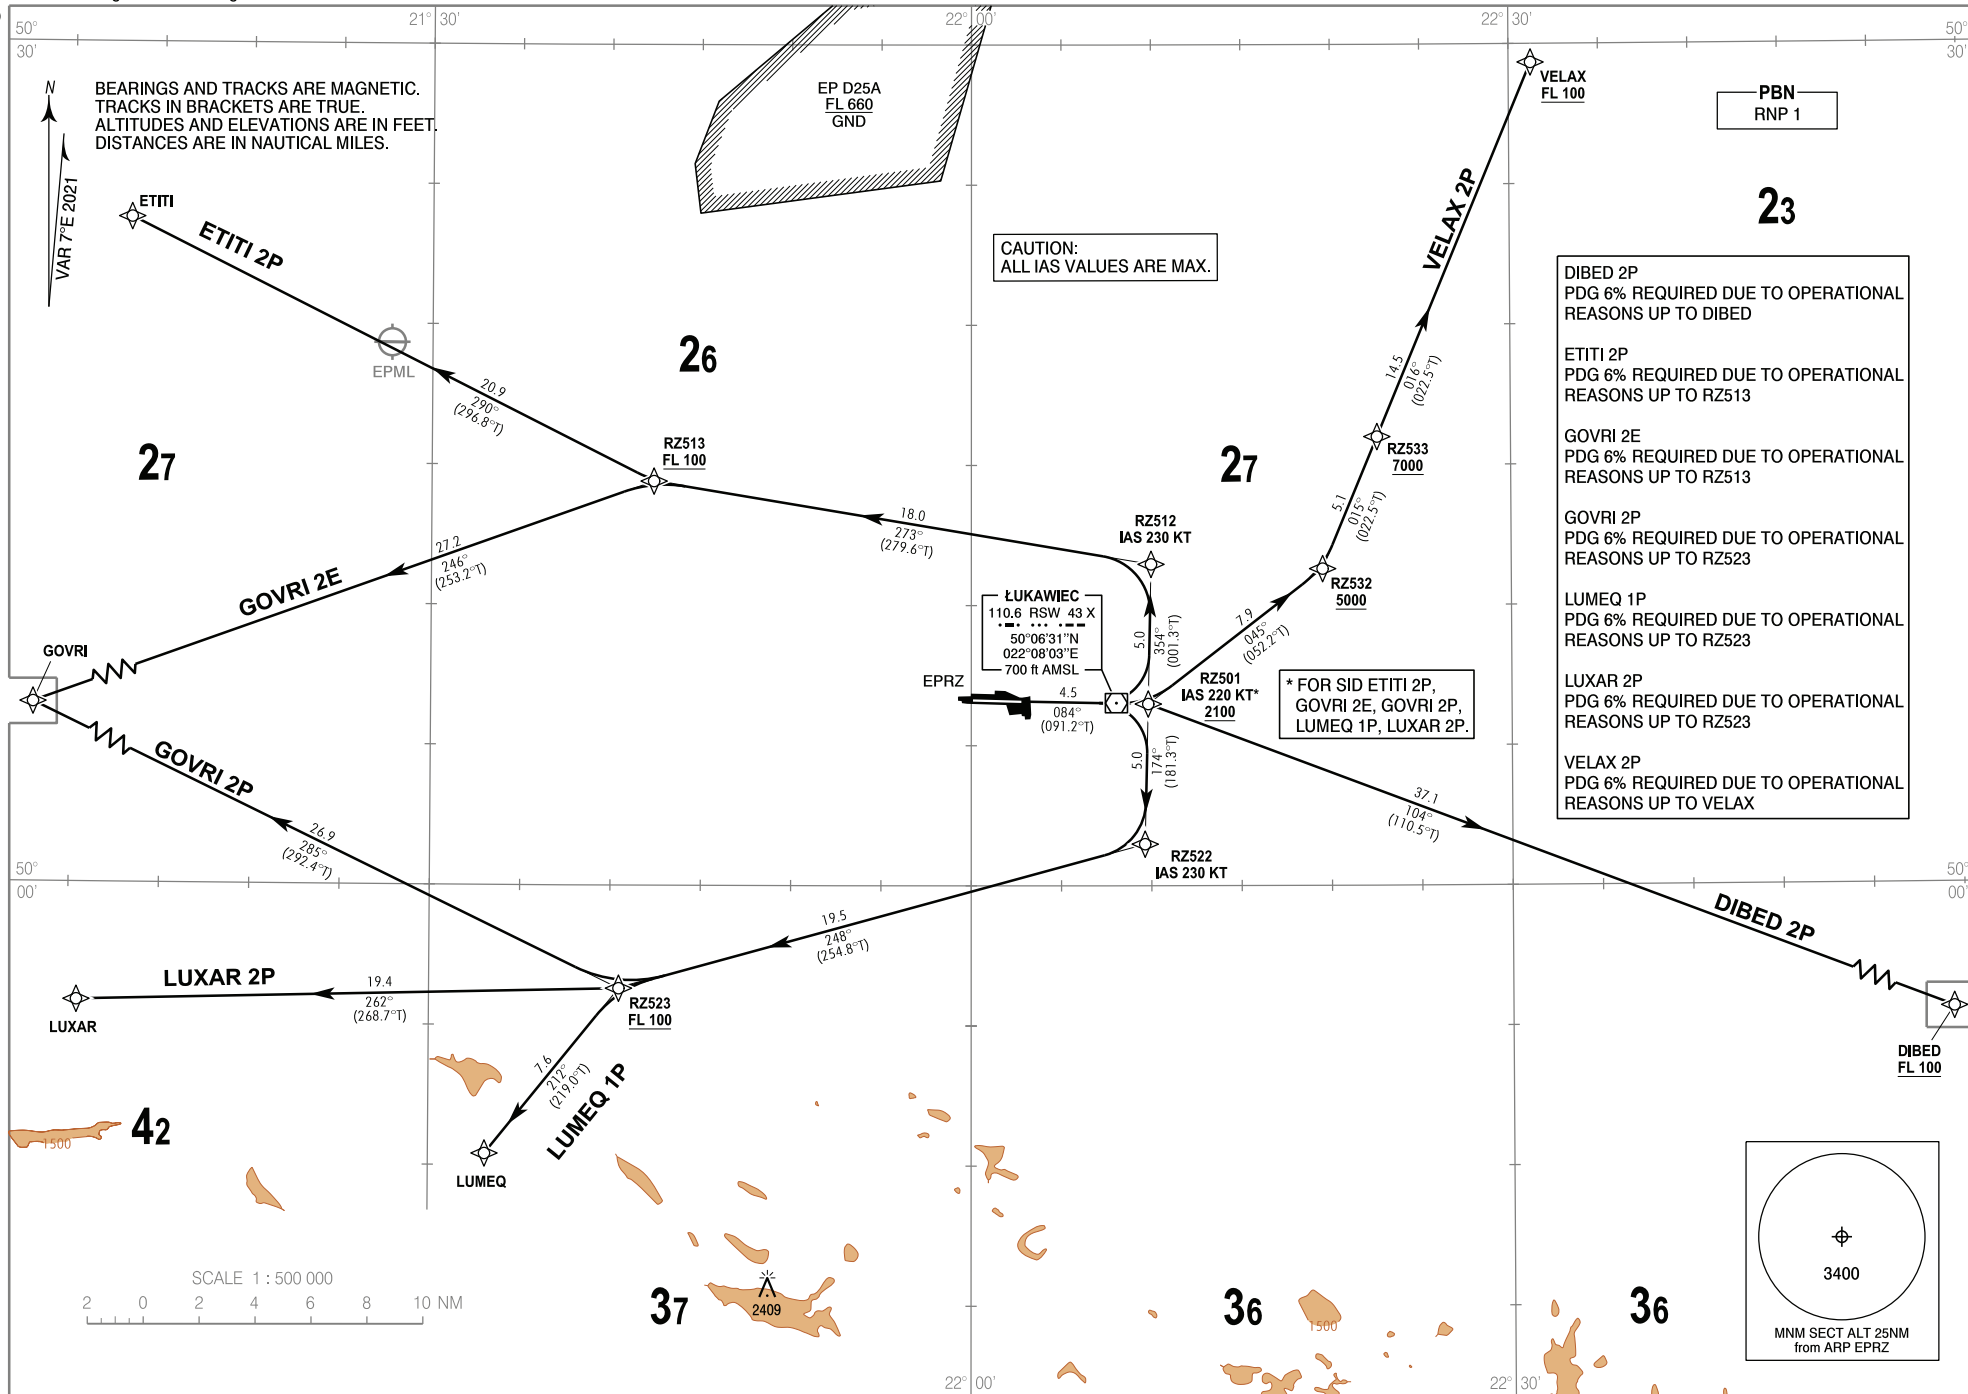

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Rzeszów - Jasionka
RNP RWY 09
DIBED 2P ETITI 2P GOVRI 2E GOVRI 2P LUMEQ 1P LUXAR 2P VELAX 2P

DIBED 2P

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL DIBED

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-	RNP 1
002	TF	DIBED	-	104 (110.5)	37.07	-	+FL100	-	RNP 1

ETITI 2P

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL RZ513

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-220	RNP 1
002	TF	RZ512	-	354 (001.3)	5.00	-	-	-230	RNP 1
003	TF	RZ513	-	273 (279.6)	18.00	-	+FL100	-	RNP 1
004	TF	ETITI	-	290 (296.8)	20.90	-	-	-	RNP 1

GOVRI 2E

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL RZ513

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-220	RNP 1
002	TF	RZ512	-	354 (001.3)	5.00	-	-	-230	RNP 1
003	TF	RZ513	-	273 (279.6)	18.00	-	+FL100	-	RNP 1
004	TF	GOVRI	-	246 (253.2)	27.20	-	-	-	RNP 1

GOVRI 2P

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL RZ523

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-220	RNP 1
002	TF	RZ522	-	174 (181.3)	5.00	-	-	-230	RNP 1
003	TF	RZ523	-	248 (254.8)	19.51	-	+FL100	-	RNP 1
004	TF	GOVRI	-	285 (292.4)	26.87	-	-	-	RNP 1

LUMEQ 1P

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL RZ523

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-220	RNP 1
002	TF	RZ522	-	174 (181.3)	5.00	-	-	-230	RNP 1
003	TF	RZ523	-	248 (254.8)	19.51	-	+FL100	-	RNP 1
004	TF	LUMEQ	-	212 (219.0)	7.59	-	-	-	RNP 1

LUXAR 2P

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL RZ523

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-220	RNP 1
002	TF	RZ522	-	174 (181.3)	5.00	-	-	-230	RNP 1
003	TF	RZ523	-	248 (254.8)	19.51	-	+FL100	-	RNP 1
004	TF	LUXAR	-	262 (268.7)	19.38	-	-	-	RNP 1

VELAX 2P

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VELAX

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ501	-	084 (091.2)	4.50	-	+2100 ft	-	RNP 1
002	TF	RZ532	-	045 (052.2)	7.89	-	+5000 ft	-	RNP 1
003	TF	RZ533	-	015 (022.5)	5.10	-	+7000 ft	-	RNP 1
004	TF	VELAX	-	016 (022.5)	14.45	-	+FL100	-	RNP 1

WAYPOINT IDENTIFIER	COORDINATES	
DIBED	49 53 18.0 N	023 03 30.0 E
ETITI	50 23 45.0 N	021 13 11.0 E
GOVRI	50 06 25.3 N	021 01 54.0 E
LUMEQ	49 50 24.6 N	021 33 07.5 E
LUXAR	49 55 48.0 N	021 10 31.0 E
RZ501	50 06 28.6 N	022 09 48.9 E
RZ512	50 11 28.3 N	022 09 59.4 E
RZ513	50 14 24.9 N	021 42 20.6 E
RZ522	50 01 29.0 N	022 09 38.4 E
RZ523	49 56 18.6 N	021 40 30.2 E
RZ532	50 11 17.8 N	022 19 31.1 E
RZ533	50 16 00.2 N	022 22 33.6 E
VELAX	50 29 20.0 N	022 31 14.0 E