


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Warszawa APPROACH	128.805, 125.055, 129.380, 135.930	Okecie TOWER	118.305, 120.040
Okecie DELIVERY	121.605	ATIS DEP	123.430
Okecie GROUND	121.905		

Lotnisko Chopina w Warszawie
RNAV RWY 11

BAMSO 7A EVINA 5A LOLSI 6A
OLILA 7A SOXER 6A XIMBA 5A

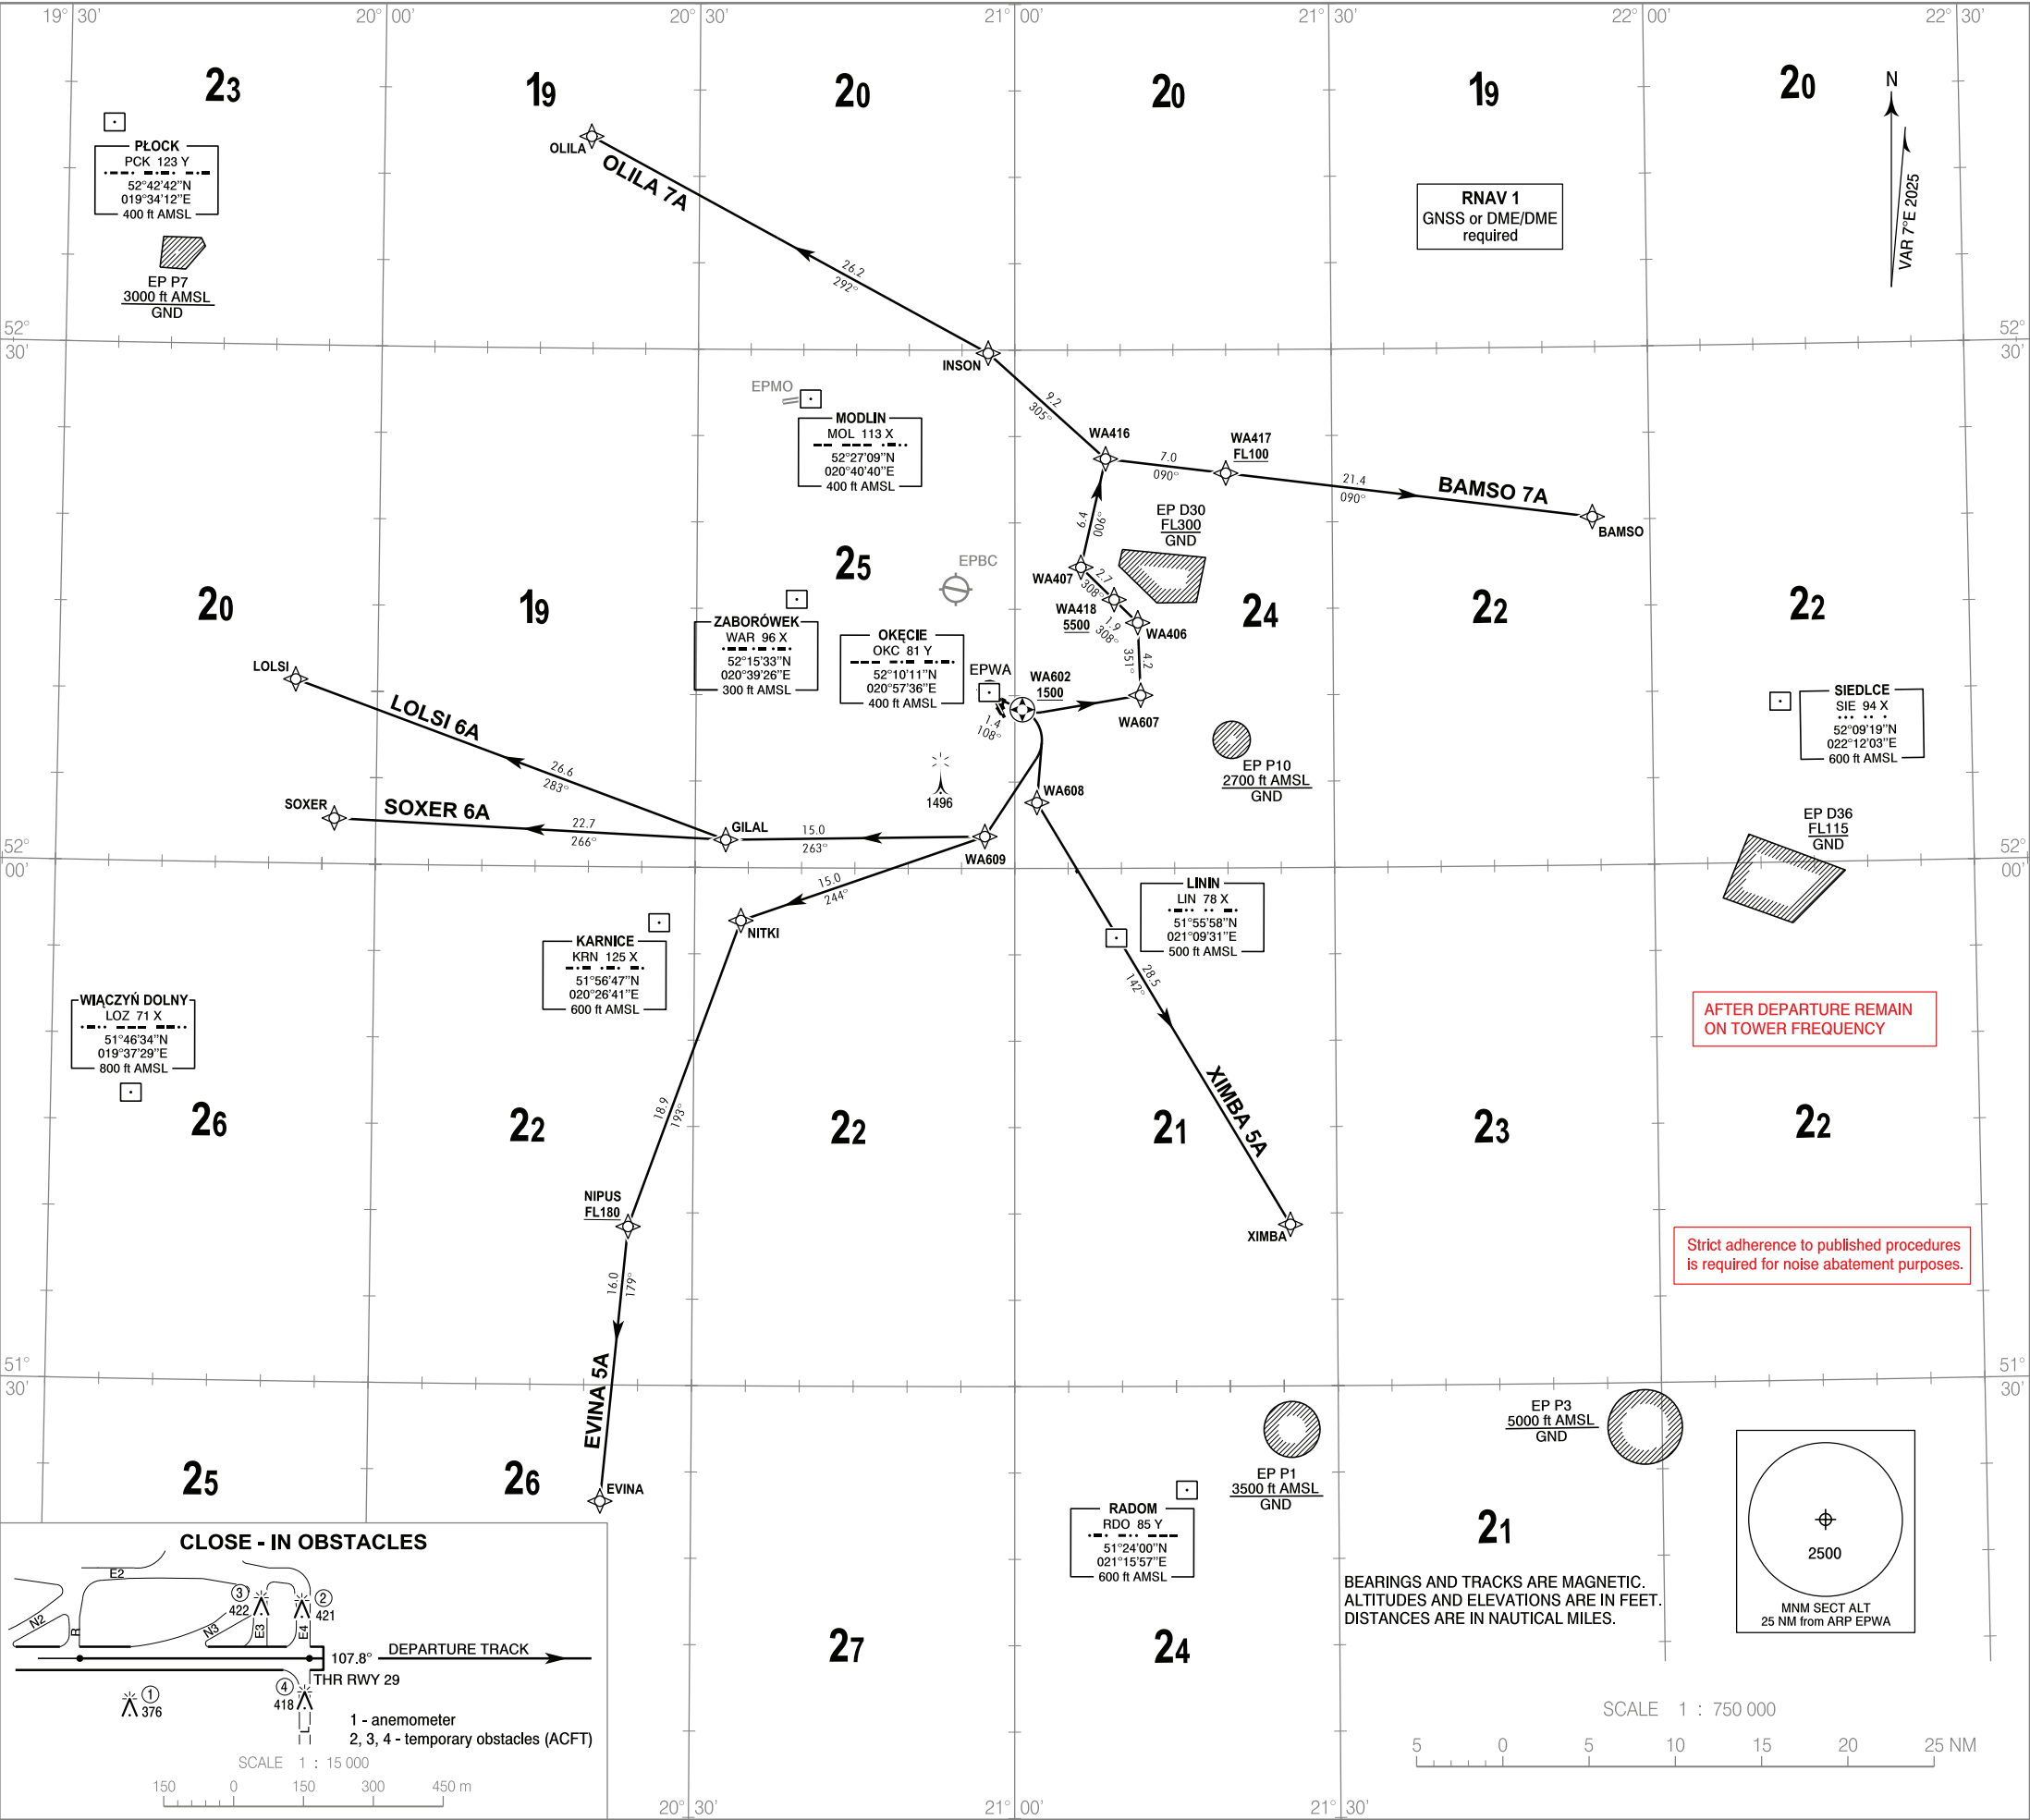

1. All aircraft which can not follow and utilize RNAV 1 procedures shall advise ATC before start up. Radar vectoring will be provided, usually along published procedures.
2. Expect direct routing/shortcuts by ATC whenever possible (especially during off-peak hours).
3. MAX IAS during initial turn as indicated in route description.
4. Initial SID climb: climb and maintain 6000 unless otherwise cleared by ATC.
5. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.


RADIO COMMUNICATION FAILURE PROCEDURE

- SET TRANSPONDER TO 7600
- a) Continue on assigned and acknowledged SID. After 3 minutes climb to FPL flight level.
 - b) If being vectored, continue on assigned heading for 3 minutes, then proceed direct to last SID WP climbing to FPL flight level.

AFTER DEPARTURE REMAIN
ON TOWER FREQUENCY

Strict adherence to published procedures
is required for noise abatement purposes.

BEARINGS AND TRACKS ARE MAGNETIC.
ALTITUDES AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.



**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

**LOTNISKO CHOPINA W WARSZAWIE
RNAV RWY 11
BAMSO 7A EVINA 5A LOLSI 6A OLILA 7A SOXER 6A XIMBA 5A**

BAMSO 7A

AFTER WA602 PDG 6% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO FL100

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA602	Y	108 (114.7)	1.40	-	+1500 ft	-210	RNAV 1
002	DF	WA607	-	-	-	-	-	-220	RNAV 1
003	TF	WA406	-	351 (357.8)	4.21	-	-	-250	RNAV 1
004	TF	WA418	-	308 (314.5)	1.91	-	+5500 ft	-	RNAV 1
005	TF	WA407	-	308 (314.4)	2.69	-	-	-270	RNAV 1
006	TF	WA416	-	006 (012.9)	6.44	-	-	-	RNAV 1
007	TF	WA417	-	090 (096.9)	7.02	-	+FL100	-	RNAV 1
008	TF	BAMSO	-	090 (097.0)	21.40	-	-	-	RNAV 1

EVINA 5A

AFTER WA602 PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UP TO FL180

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA602	Y	108 (114.7)	1.40	-	+1500 ft	-210	RNAV 1
002	DF	WA609	-	-	-	-	-	-	RNAV 1
003	TF	NITKI	-	244 (251.0)	14.96	-	-	-	RNAV 1
004	TF	NIPUS	-	193 (199.9)	18.90	-	+FL180	-	RNAV 1
005	TF	EVINA	-	179 (185.4)	16.00	-	-	-	RNAV 1

LOLSI 6A

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA602	Y	108 (114.7)	1.40	-	+1500 ft	-210	RNAV 1
002	DF	WA609	-	-	-	-	-	-	RNAV 1
003	TF	GILAL	-	263 (269.3)	15.02	-	-	-	RNAV 1
004	TF	LOLSI	-	283 (290.2)	26.62	-	-	-	RNAV 1

OLILA 7A

AFTER WA602 PDG 6% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO 5500 FT

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA602	Y	108 (114.7)	1.40	-	+1500 ft	-210	RNAV 1
002	DF	WA607	-	-	-	-	-	-220	RNAV 1
003	TF	WA406	-	351 (357.8)	4.21	-	-	-250	RNAV 1
004	TF	WA418	-	308 (314.5)	1.91	-	+5500 ft	-	RNAV 1
005	TF	WA407	-	308 (314.4)	2.69	-	-	-270	RNAV 1
006	TF	WA416	-	006 (012.9)	6.44	-	-	-	RNAV 1
007	TF	INSON	-	305 (312.1)	9.15	-	-	-	RNAV 1
008	TF	OLILA	-	292 (298.7)	26.20	-	-	-	RNAV 1

SOXER 6A

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA602	Y	108 (114.7)	1.40	-	+1500 ft	-210	RNAV 1
002	DF	WA609	-	-	-	-	-	-	RNAV 1
003	TF	GILAL	-	263 (269.3)	15.02	-	-	-	RNAV 1
004	TF	SOXER	-	266 (272.8)	22.73	-	-	-	RNAV 1

XIMBA 5A**AFTER WA602 PDG 5% REQUIRED DUE TO OPERATIONAL REASONS UNTIL XIMBA**

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA602	Y	108 (114.7)	1.40	-	+1500 ft	-210	RNAV 1
002	DF	WA608	-	-	-	-	-	-	RNAV 1
003	TF	XIMBA	-	142 (149.0)	28.52	-	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
BAMSO	52 20 09.1 N	021 54 34.5 E
EVINA	51 23 16.0 N	020 21 36.0 E
GILAL	52 01 36.5 N	020 32 52.4 E
INSON	52 29 49.0 N	020 57 29.0 E
LOLSI	52 10 38.9 N	019 52 17.0 E
NIPUS	51 39 10.8 N	020 23 59.8 E
NITKI	51 56 56.1 N	020 34 20.3 E
OLILA	52 42 16.0 N	020 19 42.0 E
SOXER	52 02 37.8 N	019 56 05.9 E
WA406	52 14 12.6 N	021 11 35.6 E
WA407	52 17 25.6 N	021 06 14.5 E
WA416	52 23 41.9 N	021 08 35.3 E
WA417	52 22 51.0 N	021 19 57.4 E
WA418	52 15 32.8 N	021 09 22.3 E
WA602	52 09 11.5 N	021 00 42.6 E
WA607	52 10 00.6 N	021 11 51.2 E
WA608	52 03 48.3 N	021 02 04.8 E
WA609	52 01 50.5 N	020 57 11.6 E
XIMBA	51 39 21.0 N	021 25 40.0 E