


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Warszawa APPROACH	128.805, 125.055, 129.380, 135.930	Okecie TOWER	118.305, 120.040
Okecie DELIVERY	121.605	ATIS DEP	123.430
Okecie GROUND	121.905		

Lotnisko Chopina w Warszawie
RNAV RWY 15

BAMSO 7D EVINA 5D LOLSI 6D
OLILA 6D SOXER 6D XIMBA 6D

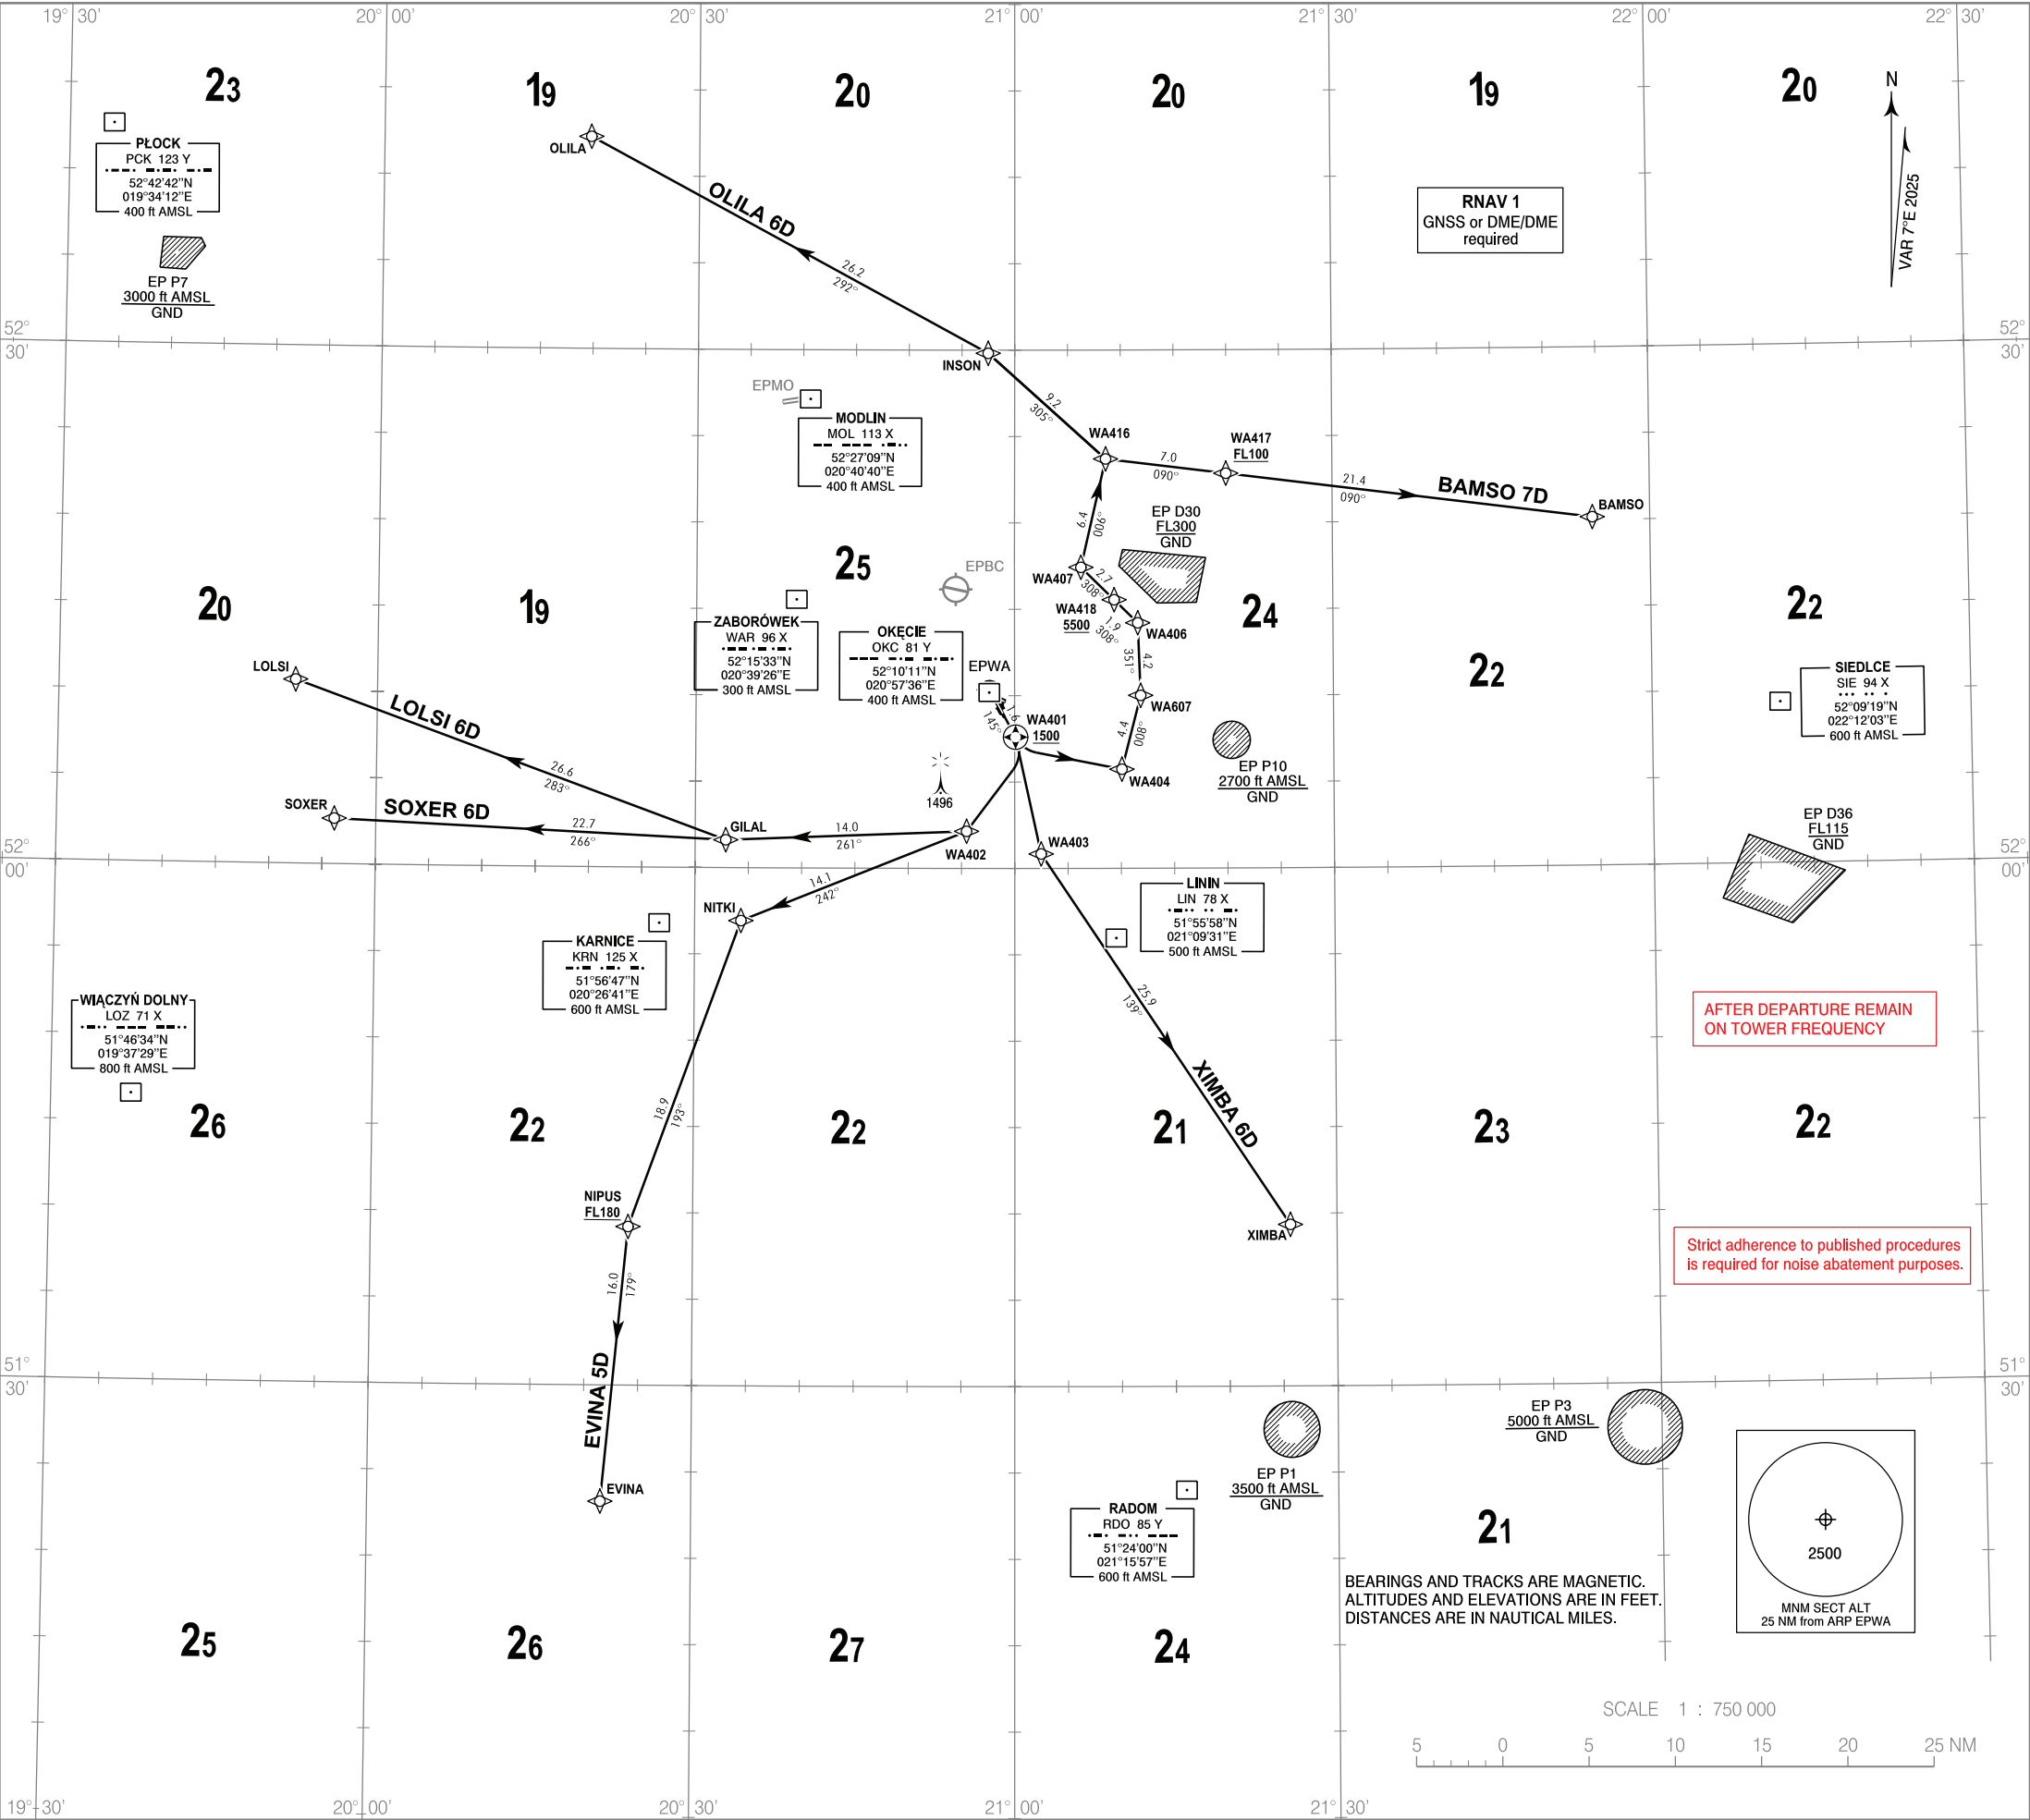

1. All aircraft which can not follow and utilize RNAV 1 procedures shall advise ATC before start up. Radar vectoring will be provided, usually along published procedures.
2. Expect direct routing/shortcuts by ATC whenever possible (especially during off-peak hours).
3. MAX IAS during initial turn as indicated in route description.
4. Initial SID climb: climb and maintain 6000 unless otherwise cleared by ATC.
5. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

RADIO COMMUNICATION FAILURE PROCEDURE

- SET TRANSPONDER TO 7600
- a) Continue on assigned and acknowledged SID. After 3 minutes climb to FPL flight level.
 - b) If being vectored, continue on assigned heading for 3 minutes, then proceed direct to last SID WP climbing to FPL flight level.

Correction: Aerodrome's name modification.

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

LOTNISKO CHOPINA W WARSZAWIE
RNAV RWY 15
BAMSO 7D EVINA 5D LOLSI 6D OLILA 6D SOXER 6D XIMBA 6D

BAMSO 7D

AFTER WA401 PDG 5% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO FL100

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)EPWA	NAV SPEC
001	CF	WA401	Y	145 (151.8)	1.55	-	+1500 ft	-200	RNAV 1
002	DF	WA404	-	-	-	-	-	-220	RNAV 1
003	TF	WA607	-	008 (014.4)	4.42	-	-	-250	RNAV 1
004	TF	WA406	-	351 (357.8)	4.21	-	-	-250	RNAV 1
005	TF	WA418	-	308 (314.5)	1.91	-	+5500 ft	-	RNAV 1
006	TF	WA407	-	308 (314.4)	2.69	-	-	-270	RNAV 1
007	TF	WA416	-	006 (012.9)	6.44	-	-	-	RNAV 1
008	TF	WA417	-	090 (096.9)	7.02	-	+FL100	-	RNAV 1
009	TF	BAMSO	-	090 (097.0)	21.40	-	-	-	RNAV 1

EVINA 5D

AFTER WA401 PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UP TO FL180

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA401	Y	145 (151.8)	1.55	-	+1500 ft	-200	RNAV 1
002	DF	WA402	-	-	-	-	-	-	RNAV 1
003	TF	NITKI	-	242 (248.4)	14.07	-	-	-	RNAV 1
004	TF	NIPUS	-	193 (199.9)	18.90	-	+FL180	-	RNAV 1
005	TF	EVINA	-	179 (185.4)	16.00	-	-	-	RNAV 1

LOLSI 6D

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA401	Y	145 (151.8)	1.55	-	+1500 ft	-200	RNAV 1
002	DF	WA402	-	-	-	-	-	-	RNAV 1
003	TF	GILAL	-	261 (267.9)	13.97	-	-	-	RNAV 1
004	TF	LOLSI	-	283 (290.2)	26.62	-	-	-	RNAV 1

OLILA 6D

AFTER WA401 PDG 5% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO 5500 FT

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA401	Y	145 (151.8)	1.55	-	+1500 ft	-200	RNAV 1
002	DF	WA404	-	-	-	-	-	-220	RNAV 1
003	TF	WA607	-	008 (014.4)	4.42	-	-	-250	RNAV 1
004	TF	WA406	-	351 (357.8)	4.21	-	-	-250	RNAV 1
005	TF	WA418	-	308 (314.5)	1.91	-	+5500 ft	-	RNAV 1
006	TF	WA407	-	308 (314.4)	2.69	-	-	-270	RNAV 1
007	TF	WA416	-	006 (012.9)	6.44	-	-	-	RNAV 1
008	TF	INSON	-	305 (312.1)	9.15	-	-	-	RNAV 1
009	TF	OLILA	-	292 (298.7)	26.20	-	-	-	RNAV 1

SOXER 6D

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA401	Y	145 (151.8)	1.55	-	+1500 ft	-200	RNAV 1
002	DF	WA402	-	-	-	-	-	-	RNAV 1
003	TF	GILAL	-	261 (267.9)	13.97	-	-	-	RNAV 1
004	TF	SOXER	-	266 (272.8)	22.73	-	-	-	RNAV 1

XIMBA 6D

AFTER WA401 PDG 5% REQUIRED DUE TO OPERATIONAL REASONS UNTIL XIMBA

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA401	Y	145 (151.8)	1.55	-	+1500 ft	-	RNAV 1
002	DF	WA403	-	-	-	-	-	-	RNAV 1
003	TF	XIMBA	-	139 (146.1)	25.88	-	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
BAMSO	52 20 09.1 N	021 54 34.5 E
EVINA	51 23 16.0 N	020 21 36.0 E
GILAL	52 01 36.5 N	020 32 52.4 E
INSON	52 29 49.0 N	020 57 29.0 E
LOLSI	52 10 38.9 N	019 52 17.0 E
NIPUS	51 39 10.8 N	020 23 59.8 E
NITKI	51 56 56.1 N	020 34 20.3 E
OLILA	52 42 16.0 N	020 19 42.0 E
SOXER	52 02 37.8 N	019 56 05.9 E
WA401	52 07 36.0 N	021 00 04.5 E
WA402	52 02 08.8 N	020 55 28.4 E
WA403	52 00 50.3 N	021 02 28.6 E
WA404	52 05 44.3 N	021 10 04.5 E
WA406	52 14 12.6 N	021 11 35.6 E
WA407	52 17 25.6 N	021 06 14.5 E
WA416	52 23 41.9 N	021 08 35.3 E
WA417	52 22 51.0 N	021 19 57.4 E
WA418	52 15 32.8 N	021 09 22.3 E
WA607	52 10 00.6 N	021 11 51.2 E
XIMBA	51 39 21.0 N	021 25 40.0 E