


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Warszawa APPROACH	128.805, 125.055, 129.380, 135.930	Okecie TOWER	118.305, 120.040
Okecie DELIVERY	121.605	ATIS DEP	123.430
Okecie GROUND	121.905		

Lotnisko Chopina w Warszawie
RNAV RWY 29

BAMSO 7G EVINA 7G LOLSI 7G
OLILA 6G SOXER 7G XIMBA 8G

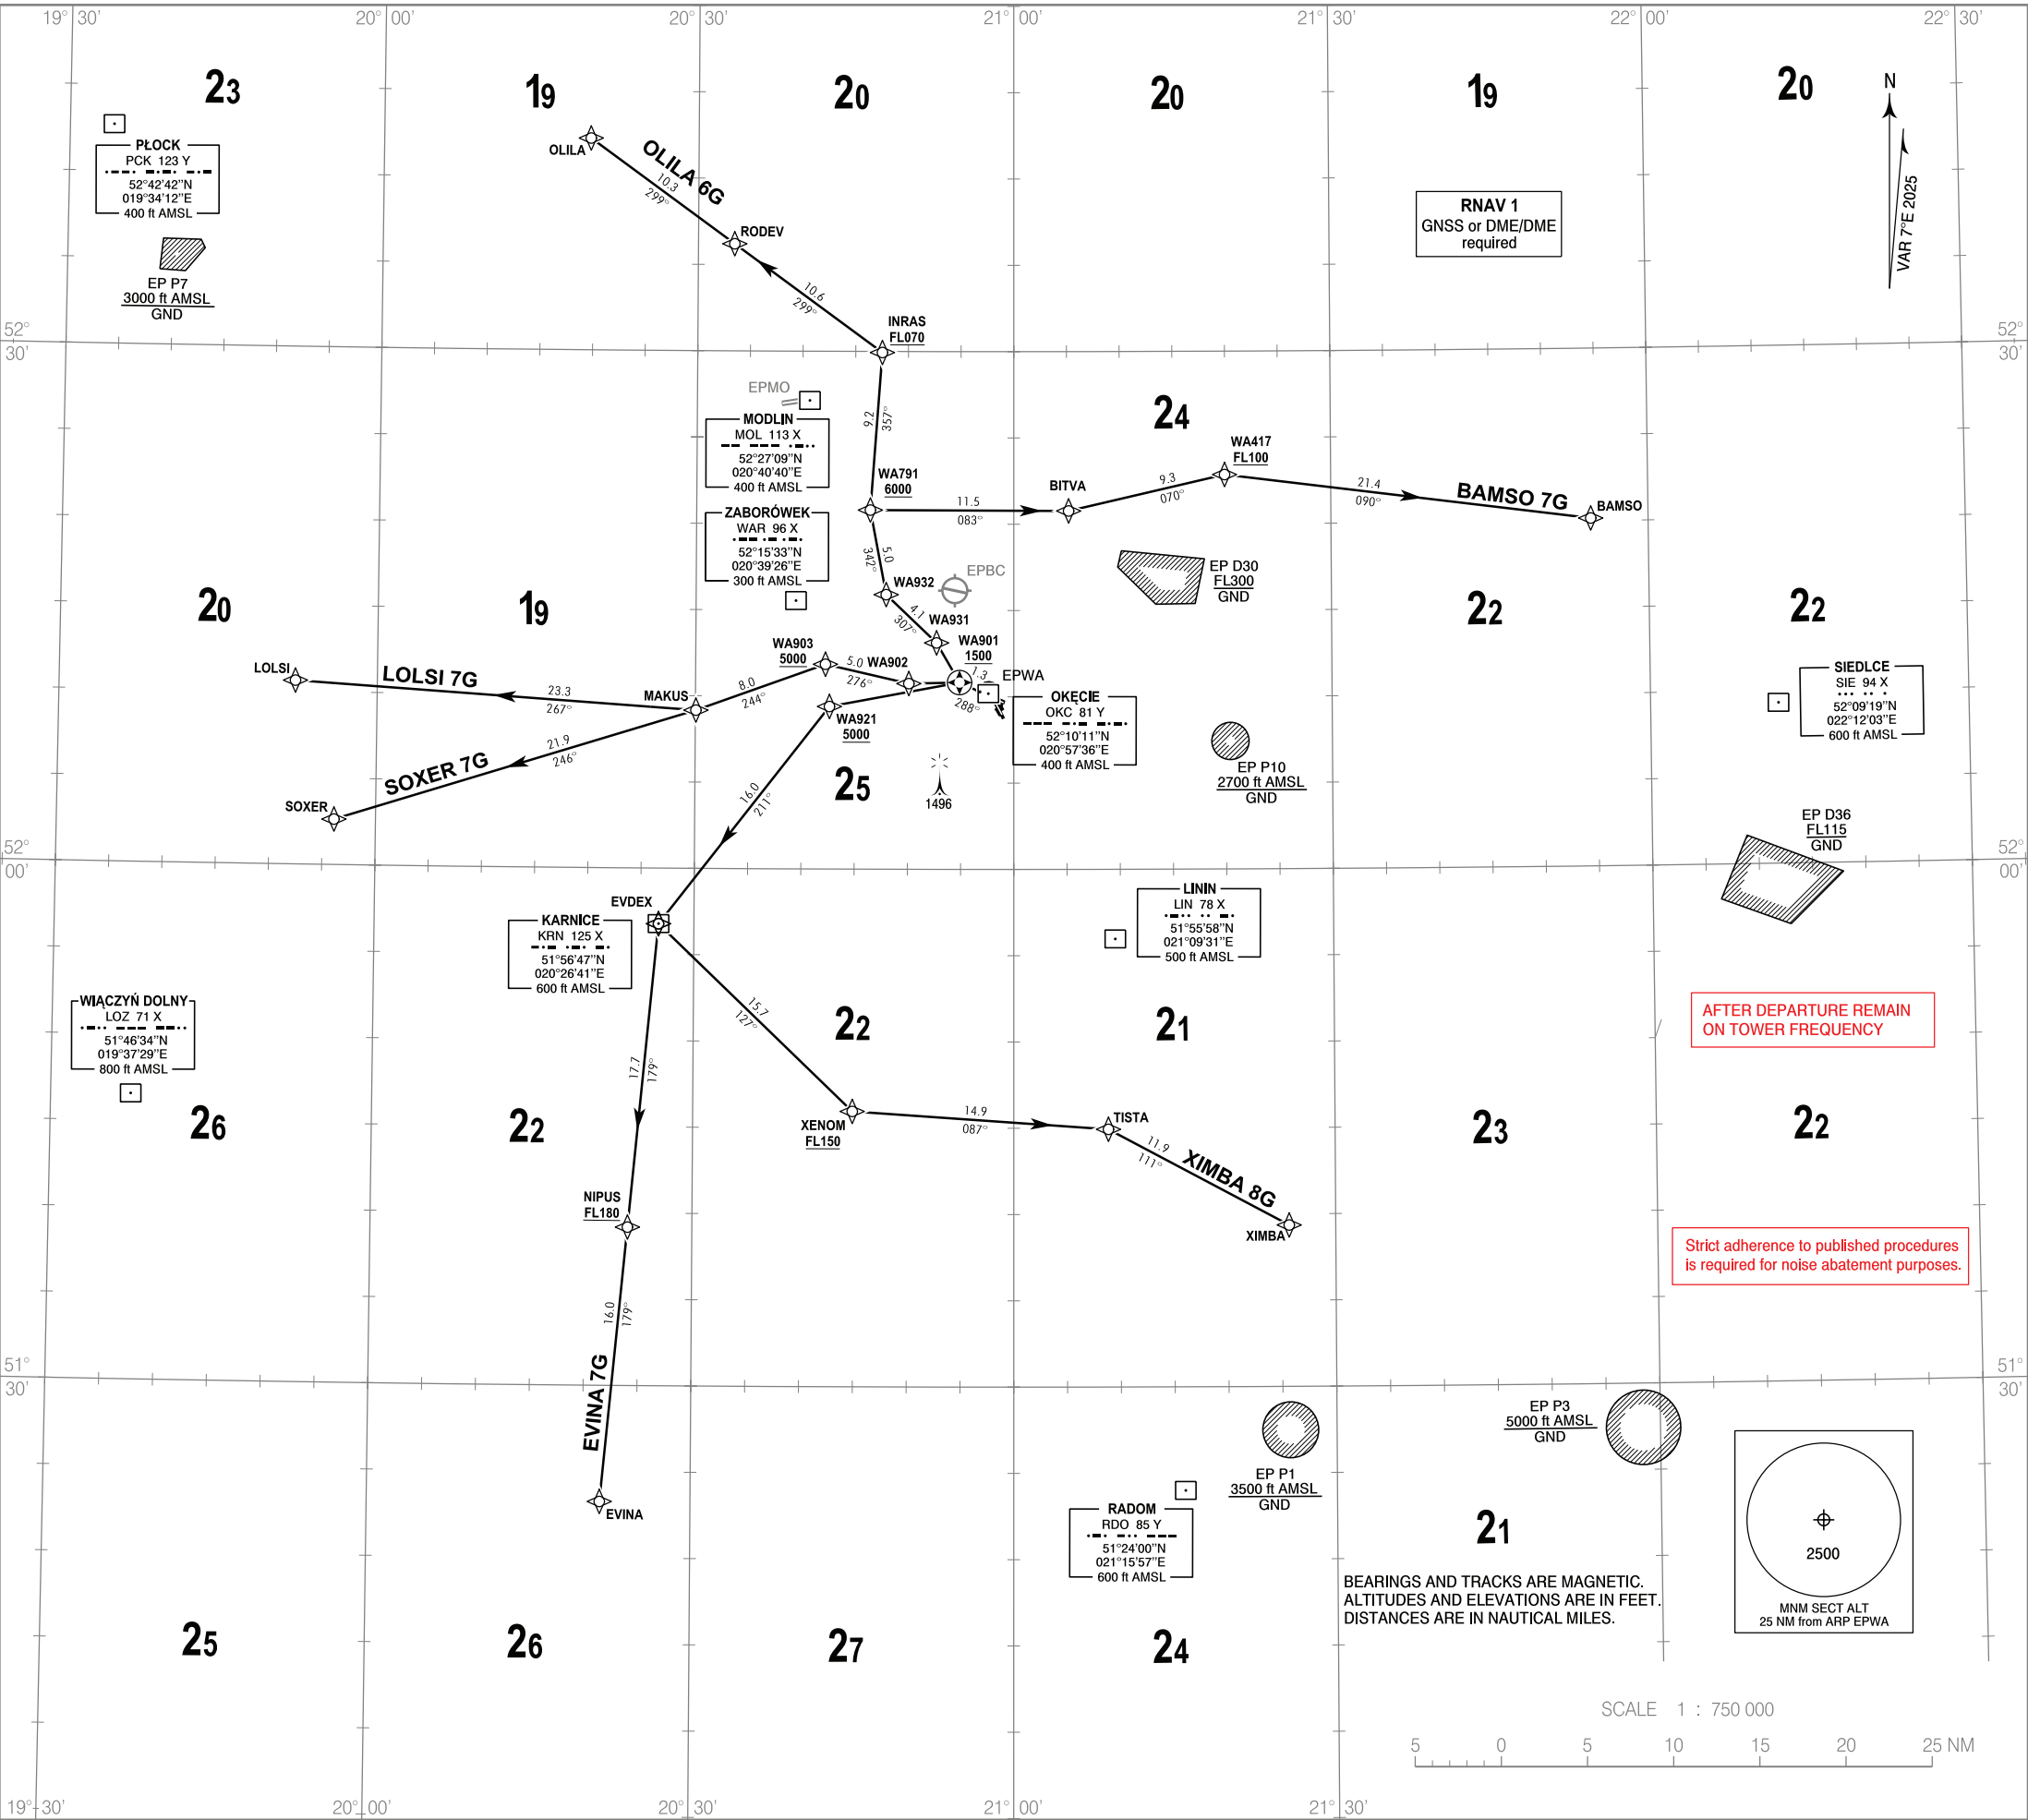

1. All aircraft which can not follow and utilize RNAV 1 procedures shall advise ATC before start up. Radar vectoring will be provided, usually along published procedures.
2. Expect direct routing/shortcuts by ATC whenever possible (especially during off-peak hours).
3. MAX IAS during initial turn as indicated in route description.
4. Initial SID climb: climb and maintain 6000 unless otherwise cleared by ATC.
5. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

RADIO COMMUNICATION FAILURE PROCEDURE

- SET TRANSPONDER TO 7600
- a) Continue on assigned and acknowledged SID. After 3 minutes climb to FPL flight level.
 - b) If being vectored, continue on assigned heading for 3 minutes, then proceed direct to last SID WP climbing to FPL flight level.

Correction: Aerodrome's name modification.

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

LOTNISKO CHOPINA W WARSZAWIE
RNAV RWY 29
BAMSO 7G EVINA 7G LOLSI 7G OLILA 6G SOXER 7G XIMBA 8G

BAMSO 7G

AFTER WA901 PDG 7% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO 6000 FT

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA901	Y	288 (294.5)	1.30	-	+1500 ft	-200	RNAV 1
002	DF	WA931	-	-	-	-	-	-	RNAV 1
003	TF	WA932	-	307 (313.7)	4.05	-	-	-240	RNAV 1
004	TF	WA791	-	342 (349.3)	4.99	-	+6000 ft	-240	RNAV 1
005	TF	BITVA	-	083 (090.1)	11.50	-	-	-	RNAV 1
006	TF	WA417	-	070 (076.9)	9.29	-	+FL100	-	RNAV 1
007	TF	BAMSO	-	090 (097.0)	21.40	-	-	-	RNAV 1

EVINA 7G

AFTER WA901 PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UP TO FL180

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA901	Y	288 (294.5)	1.30	-	+1500 ft	-200	RNAV 1
002	DF	WA921	-	-	-	-	+5000 ft	-	RNAV 1
003	TF	EVDEX	-	211 (218.0)	16.04	-	-	-	RNAV 1
004	TF	NIPUS	-	179 (185.4)	17.70	-	+FL180	-	RNAV 1
005	TF	EVINA	-	179 (185.4)	16.00	-	-	-	RNAV 1

LOLSI 7G

AFTER WA901 PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UP TO 5000 FT

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA901	Y	288 (294.5)	1.30	-	+1500 ft	-200	RNAV 1
002	DF	WA902	-	-	-	-	-	-	RNAV 1
003	TF	WA903	-	276 (282.9)	4.97	-	+5000 ft	-	RNAV 1
004	TF	MAKUS	-	244 (250.3)	7.98	-	-	-	RNAV 1
005	TF	LOLSI	-	267 (273.9)	23.30	-	-	-	RNAV 1

OLILA 6G

AFTER WA901 PDG 7% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO 6000 FT

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA901	Y	288 (294.5)	1.30	-	+1500 ft	-200	RNAV 1
002	DF	WA931	-	-	-	-	-	-	RNAV 1
003	TF	WA932	-	307 (313.7)	4.05	-	-	-	RNAV 1
004	TF	WA791	-	342 (349.3)	4.99	-	+6000 ft	-	RNAV 1
005	TF	INRAS	-	357 (004.2)	9.17	-	+FL070	-	RNAV 1
006	TF	RODEV	-	299 (306.2)	10.64	-	-	-	RNAV 1
007	TF	OLILA	-	299 (306.0)	10.35	-	-	-	RNAV 1

SOXER 7G**AFTER WA901 PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UP TO 5000 FT**

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA901	Y	288 (294.5)	1.30	-	+1500 ft	-200	RNAV 1
002	DF	WA902	-	-	-	-	-	-	RNAV 1
003	TF	WA903	-	276 (282.9)	4.97	-	+5000 ft	-	RNAV 1
004	TF	MAKUS	-	244 (250.3)	7.98	-	-	-	RNAV 1
005	TF	SOXER	-	246 (252.9)	21.94	-	-	-	RNAV 1

XIMBA 8G**AFTER WA901 PDG 7% REQUIRED DUE TO OPERATIONAL REASONS UP TO FL150**

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA901	Y	288 (294.5)	1.30	-	+1500 ft	-200	RNAV 1
002	DF	WA921	-	-	-	-	+5000 ft	-	RNAV 1
003	TF	EVDEX	-	211 (218.0)	16.04	-	-	-	RNAV 1
004	TF	XENOM	-	127 (133.7)	15.65	-	+FL150	-	RNAV 1
005	TF	TISTA	-	087 (093.8)	14.91	-	-	-	RNAV 1
006	TF	XIMBA	-	111 (118.0)	11.87	-	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
BAMSO	52 20 09.1 N	021 54 34.5 E
BITVA	52 20 46.0 N	021 05 11.3 E
EVDEX	51 56 46.5 N	020 26 40.6 E
EVINA	51 23 16.0 N	020 21 36.0 E
INRAS	52 29 56.3 N	020 47 31.8 E
LOLSI	52 10 38.9 N	019 52 17.0 E
MAKUS	52 09 10.0 N	020 30 03.0 E
NIPUS	51 39 10.8 N	020 23 59.8 E
OLILA	52 42 16.0 N	020 19 42.0 E
RODEV	52 36 12.2 N	020 33 27.2 E
SOXER	52 02 37.8 N	019 56 05.9 E
TISTA	51 44 56.0 N	021 08 50.5 E
WA417	52 22 51.0 N	021 19 57.4 E
WA791	52 20 48.4 N	020 46 26.0 E
WA901	52 10 49.5 N	020 54 53.2 E
WA902	52 10 45.6 N	020 50 06.4 E
WA903	52 11 51.9 N	020 42 14.4 E
WA921	52 09 25.1 N	020 42 37.8 E
WA931	52 13 07.2 N	020 52 43.0 E
WA932	52 15 54.6 N	020 47 57.0 E
XENOM	51 45 57.5 N	020 44 54.5 E
XIMBA	51 39 21.0 N	021 25 40.0 E