
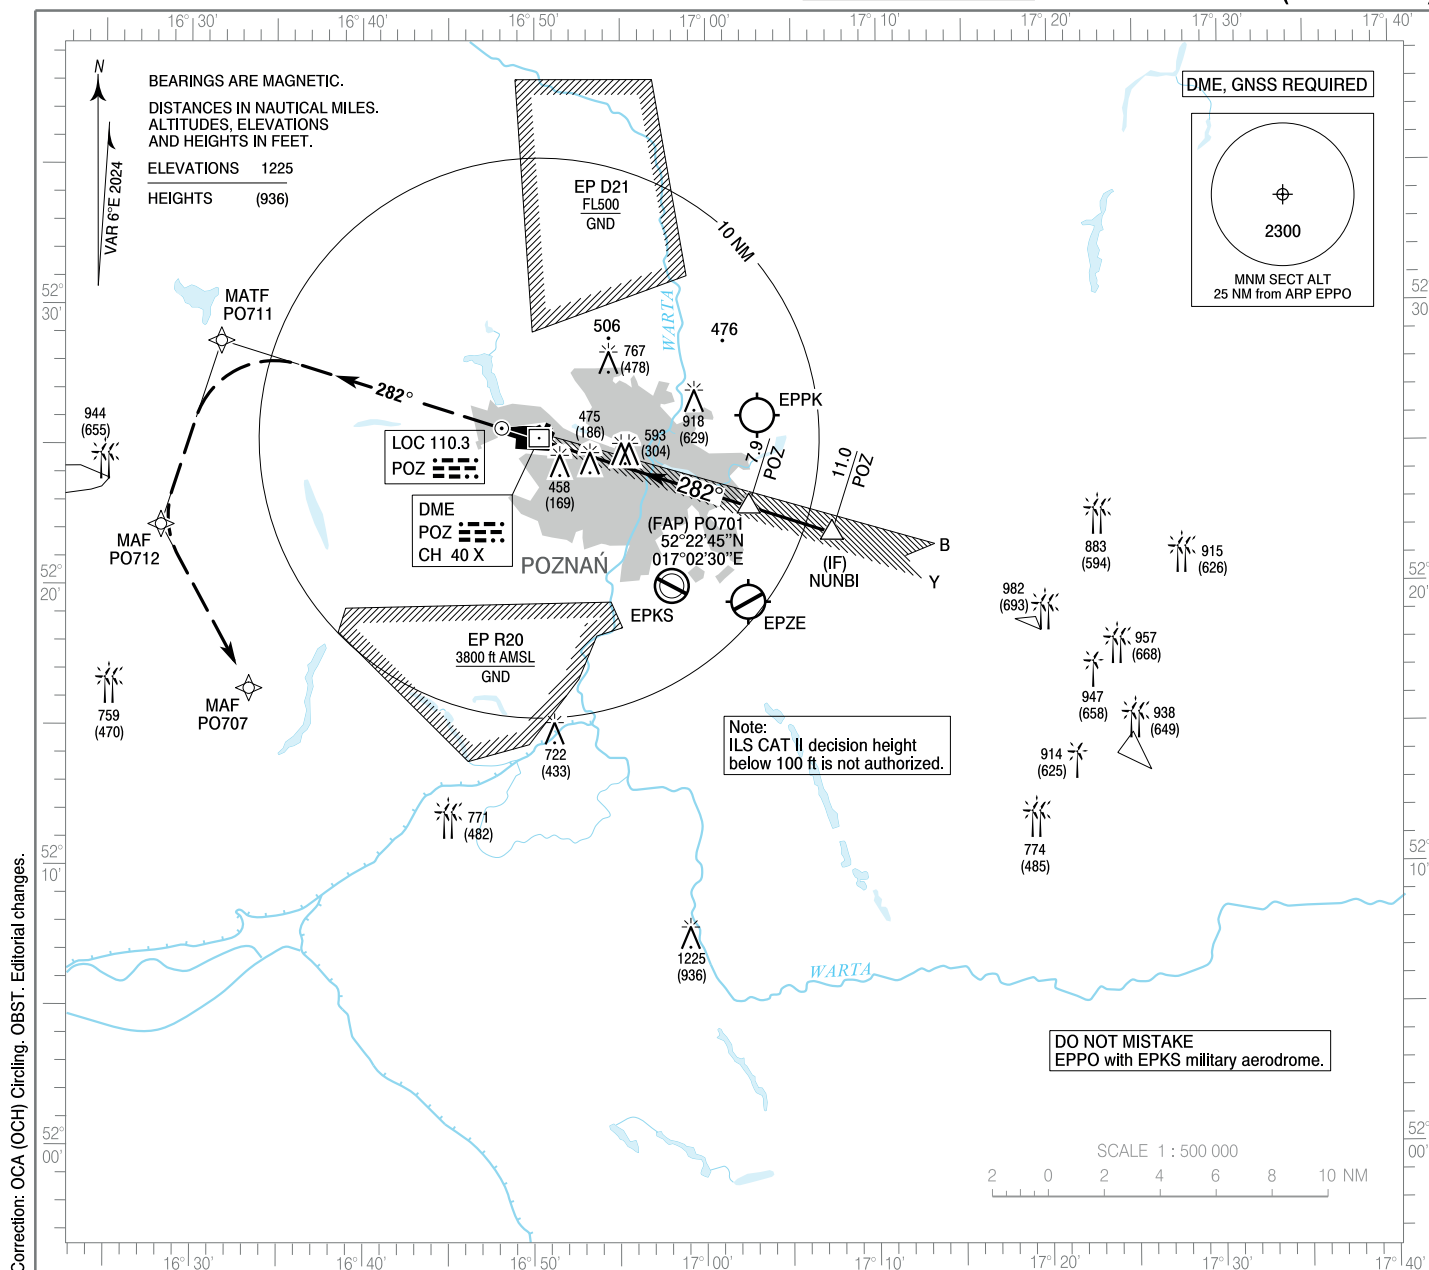


INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 309 ft
THR RWY 28 ELEV 289 ft
HEIGHTS RELATED TO THR RWY 28Poznań APPROACH 128.925
Poznań GROUND 124.140
Poznań TOWER 119.980
ATIS 124.705Poznań - Ławica
ILS z CAT II
RWY 28 (CAT A/B/C/D)

MISSED APPROACH

Climb on course 282° to PO711 then turn left to PO712 and continue to PO707 climbing to 4000 (3711). Turns limited to 220 kt IAS max. Further instructions from ATC.

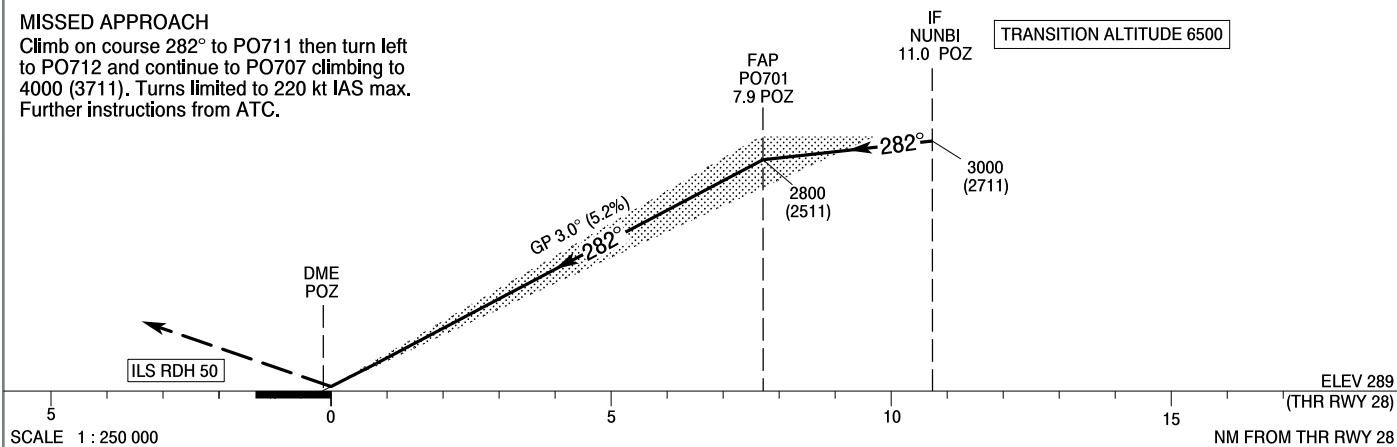

OCA (OCH)						Distance FAP - RW28 7.7 NM							
Cat. of ACFT		A	B	C	D	Speed	kt	80	100	120	140	160	180
Straight - in	Cat. I	497 (208)	509 (220)	517 (228)	528 (239)	Time	min : s	5 : 48	4 : 38	3 : 52	3 : 19	2 : 54	2 : 35
	Cat. II	387 (98)	404 (115)	416 (127)	430 (141)	Rate of descent	ft/min	420	530	640	740	850	960
						Final approach distance / altitude (height)							
Circling (OCH AAL)		740 (431)	740 (431)	1170 (861)	1170 (861)	Distance	7	6	5	4	3	2	
						Altitude (height)	2520 (2231)	2200 (1911)	1890 (1601)	1570 (1281)	1250 (961)	930 (641)	

POZNAŃ - ŁAWICA
ILS z CAT II
RWY 28 (CAT A/B/C/D)

EPPO RNP RWY 28 MISSED APPROACH

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	VPA/TCH	NAV SPEC
001	-	RW28	-	-	-	-	-	-	-	RNP APCH
002	CF	PO711	-	282 (287.60)	12.00	L	-	-220	-	RNP APCH
003	TF	PO712	-	192 (198.17)	6.90	L	-	-220	-	RNP APCH
004	TF	PO707	-	146 (151.66)	6.65	-	+4000 ft	-	-	RNP APCH

WAYPOINT IDENTIFIER	COORDINATES		FIX FORMATION	
NUNBI (IF)	522148.2N	0170720.0E	287.53° GEO (282°) MAG LOC POZ	11.01 NM DME POZ
PO701 (FAP)	522245.1N	0170229.5E	287.53° GEO (282°) MAG LOC POZ	7.89 NM DME POZ
RW28	522505.4N	0165027.9E	-	-
PO711 (MATF)	522841.2N	0163145.4E	-	-
PO712 (MAF)	522208.2N	0162814.7E	-	-
PO707 (MAF)	521617.4N	0163323.0E	-	-